


|                        |                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>3132-10v</b>                                                                                                                                                                                                                                                                                                                                                           |
| article description    | <b>CEE-flanged socket straight (75x75mm) 16A 3p 10h IP67</b>                                                                                                                                                                                                                                                                                                              |
| description long       | CEE-flanged socket straight (75x75mm) 16A 3p 10h IP67<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 10h<br>rated voltage/frequency: >50V~ / 100-300Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 75x75 mm / 60x60 mm<br>IP protection class: IP67 |
| GTIN (EAN)             | 9003399108051                                                                                                                                                                                                                                                                                                                                                             |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                        |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                  |
| net weight             | 0.135 kg                                                                                                                                                                                                                                                                                                                                                                  |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                        |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                        |

|                                 |                             |
|---------------------------------|-----------------------------|
| ETIM 9.0                        | EC001317                    |
| IEC-ampereage                   | 16 A                        |
| Voltage according to EN 60309-2 | 50-500 V (100-300 Hz) green |
| Number of poles                 | 3                           |
| Clock hour position             | 10 h                        |
| Identification colour           | Green                       |
| Degree of protection (IP)       | IP67                        |
| Connection system               | Screwed terminal            |
| Angle of plug                   | Straight                    |
| Material                        | Plastic                     |
| Contact material                | CuZn                        |
| Surface treatment contacts      | Nickel-plated               |
| Flange size vertical            | 75 mm                       |
| Drill hole distance vertical    | 60 mm                       |
| Flange size horizontal          | 75 mm                       |
| Drill hole distance horizontal  | 60 mm                       |

|                        |                       |
|------------------------|-----------------------|
| a                      | 75 mm                 |
| b                      | 75 mm                 |
| c                      | 60 mm                 |
| d                      | 60 mm                 |
| e                      | 21 mm                 |
| f                      | 56 mm                 |
| g                      | 5,5 mm                |
| h                      | 43 mm                 |
| i                      | 102 mm                |
| j                      | 101 mm                |
| wire flexible          | 1-2,5 mm <sup>2</sup> |
| wire solid             | 1-4 mm <sup>2</sup>   |
| contact screws         | 100 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 10-12 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |

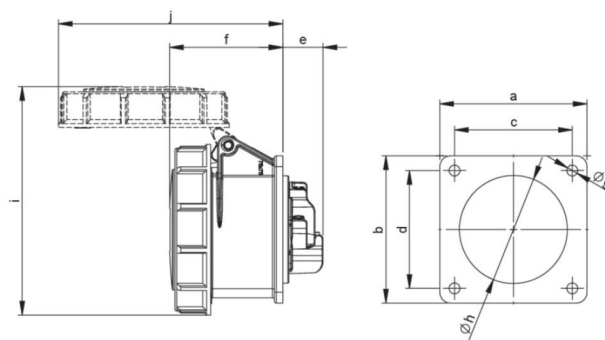

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3132-10v>