


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>335-9</b>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| article description    | <b>CEE-flanged socket straight (100x100) 63A 5p 9h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                                              |
| description long       | CEE-flanged socket straight (100x100) 63A5p 9h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x100 mm / 80x80 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399200212                                                                                                                                                                                                                                                                                                                                                                                                                        |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                             |
| net weight             | 0.587 kg                                                                                                                                                                                                                                                                                                                                                                                                                             |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                 |                       |
|---------------------------------|-----------------------|
| ETIM 9.0                        | EC001317              |
| IEC-amperage                    | 63 A                  |
| Voltage according to EN 60309-2 | 230 V (50+60 Hz) blue |
| Number of poles                 | 5                     |
| Clock hour position             | 9 h                   |
| Identification colour           | Blue                  |
| Degree of protection (IP)       | IP67                  |
| Connection system               | Screwed terminal      |
| Angle of plug                   | Straight              |
| Material                        | Plastic               |
| Contact material                | CuZn                  |
| Surface treatment contacts      | Untreated             |
| Flange size vertical            | 100 mm                |
| Drill hole distance vertical    | 80 mm                 |
| Flange size horizontal          | 100 mm                |
| Drill hole distance horizontal  | 80 mm                 |

|                        |                      |
|------------------------|----------------------|
| a                      | 100 mm               |
| b                      | 100 mm               |
| c                      | 80 mm                |
| d                      | 80 mm                |
| e                      | 50 mm                |
| f                      | 80 mm                |
| g                      | 7 mm                 |
| h                      | 85 mm                |
| i                      | 147 mm               |
| j                      | 146 mm               |
| wire flexible          | 6-16 mm <sup>2</sup> |
| wire solid             | 6-25 mm <sup>2</sup> |
| contact screws         | 200 Ncm              |
| dismantling length     | 100 mm               |
| stripping length       | 15-18 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

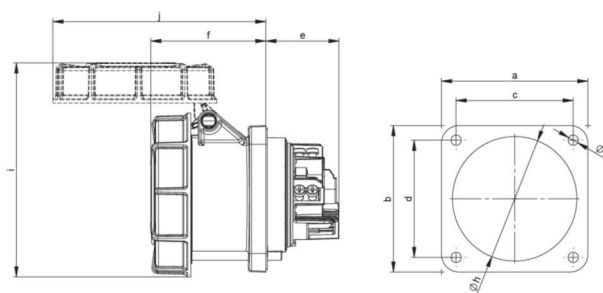

<https://www.pcelectric.at/shop/en/?func=detail&artnr=335-9>