


article#	4445-7fe
article description	CEE-flanged socket sloping (114x114) 125A 4p 7h IP67 Pilot POWER TWIST
description long	CEE-flanged socket sloping (114x114) 125A 4p 7h IP67 Pilot POWER TWIST housing material: PA6 rated current: 125A number of poles: 4 (3P+PE) clock-position: 7h rated voltage/frequency: 480-500V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 114x114 mm / 90x90 mm with pilot contact sleeve IP protection class: IP66/IP67
GTIN (EAN)	9003399238260
country of origin	AT
customs number	85366990
net weight	0.966 kg
packaging quantity	2
minimum order quantity	2



ETIM 9.0	EC001317
IEC-amperage	125 A
Voltage according to EN 60309-2	500 V (50+60 Hz) black
Number of poles	4
Clock hour position	7 h
Identification colour	Black
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	114 mm
Drill hole distance vertical	90 mm
Flange size horizontal	114 mm
Drill hole distance horizontal	90 mm

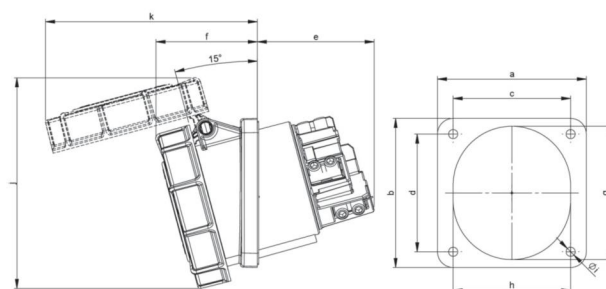

a	114 mm
b	114 mm
c	90 mm
d	90 mm
e	92 mm
f	77 mm
g	102 mm
h	90 mm
i	7 mm
j	160 mm
k	162 mm
wire flexible	16-50 / 1-2,5 (Pilotkontakt) mm²
wire solid	16-70 / 1-4 (Pilotkontakt) mm²
contact screws	450 / 100 (Pilotkontakt) Ncm
dismantling length	100 mm
stripping length	24-27 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C



<https://www.pcelectric.at/shop/en/?func=detail&artnr=4445-7fe>

