


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>76242-4</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| article description    | <b>CEE-switched interlocked socket DIN 32A 4p 4h IP66/IP67</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| description long       | CEE-switched interlocked socket DIN 32A 4p 4h IP66/IP67<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>wall mounting, mechanical interlock, hinged window (5 modules), DIN-rail<br>switch: ON/OFF PCE-Merz ML0; EN 60947-3; AC22A, 10kA<br>cable entry: top, bottom or rear (incl. threaded blind cap)<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399170751                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| net weight             | 1.571 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| packaging quantity     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| minimum order quantity | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                                  |                         |
|----------------------------------|-------------------------|
| ETIM 9.0                         | EC001324                |
| IEC-amperage                     | 32 A                    |
| Number of poles                  | 4                       |
| Voltage according to EN 60309-2  | 110 V (50+60 Hz) yellow |
| Clock hour position              | 4 h                     |
| Identification colour            | Yellow                  |
| Degree of protection (IP)        | IP67                    |
| Switch                           | Mechanical locking      |
| Empty locations on mounting rail | True                    |
| Material housing                 | Plastic                 |
| Model                            | Base unit and cover     |
| Protection                       | None                    |
| Contact material                 | CuZn                    |
| Surface treatment contacts       | Nickel-plated           |

|                        |                        |
|------------------------|------------------------|
| a                      | 371 mm                 |
| b                      | 153 mm                 |
| wire flexible          | 2,5-6 mm <sup>2</sup>  |
| wire solid             | 2,5-10 mm <sup>2</sup> |
| contact screws         | 120 Ncm                |
| housing screws         | 110 Ncm                |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

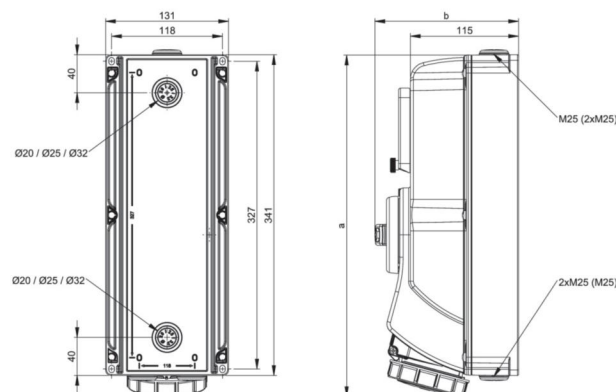

<https://www.pcelectric.at/shop/en/?func=detail&artnr=76242-4>