


|                        |                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>363f9v</b>                                                                                                                                                                                                                                                                                                                                                        |
| article description    | <b>CEE-flanged socket straight 54x60mm 16A 3p 24VAC 50/60Hz IP44/IP54 TWIST</b>                                                                                                                                                                                                                                                                                      |
| description long       | CEE-flanged socket straight 54x60mm 16A 3p 24VAC 50/60Hz IP44/IP54 TWIST<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (3P)<br>rated voltage/frequency: 24V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 54x60 mm / 44x44 mm<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399309649                                                                                                                                                                                                                                                                                                                                                        |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                   |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                             |
| net weight             | 0.132 kg                                                                                                                                                                                                                                                                                                                                                             |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                   |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                   |

|                                 |                           |
|---------------------------------|---------------------------|
| ETIM 9.0                        | EC001317                  |
| IEC-amperage                    | 16 A                      |
| Voltage according to EN 60309-2 | 20-25 V (50+60 Hz) violet |
| Number of poles                 | 3                         |
| Identification colour           | Purple                    |
| Degree of protection (IP)       | IP54                      |
| Connection system               | Screwed terminal          |
| Angle of plug                   | Straight                  |
| Material                        | Plastic                   |
| Contact material                | CuZn                      |
| Surface treatment contacts      | Nickel-plated             |
| Flange size vertical            | 60 mm                     |
| Drill hole distance vertical    | 44 mm                     |
| Flange size horizontal          | 54 mm                     |
| Drill hole distance horizontal  | 44 mm                     |

|                        |                        |
|------------------------|------------------------|
| a                      | 54 mm                  |
| b                      | 60 mm                  |
| c                      | 44 mm                  |
| d                      | 44 mm                  |
| e                      | 19 mm                  |
| f                      | 47 mm                  |
| g                      | 5,5 mm                 |
| h                      | 43 mm                  |
| i                      | 81 mm                  |
| j                      | 93 mm                  |
| wire flexible          | 1-10 mm <sup>2</sup>   |
| wire solid             | 1,5-10 mm <sup>2</sup> |
| contact screws         | 160 Ncm                |
| dismantling length     | 70 mm                  |
| stripping length       | 14-16 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

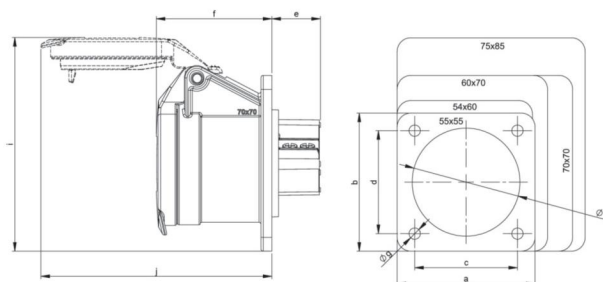

<https://www.pcelectric.at/shop/en/?func=detail&artnr=363f9v>

