



WAFA-5604-10B WALL-MOUNT CABINET ASSEMBLED

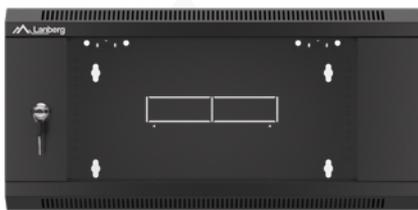


SPECIFICATION:

Rack standard		19"		
Server cabinet type		Wall-mount, single section		
Assembly		Assembled		
Material of the frame and other element(s)		High-grade cold-rolled steel (SPCC), powder-coated		
Surface finish of the frame and other element(s)		Degreased, pickled, parkerized, powder coated with a matt finish. Protected against oxidation, corrosion, rust		
Height		4 [U]		
		277 [mm]		
Width	Cabinet structure	570 [mm]		
	Cabinet structure incl. door lock(s)	580 [mm]		
Length	Cabinet structure	600 [mm]		
	Cabinet structure incl. door lock(s) and wall-mount rail	606.20 [mm]		
Mounting depth	Front rail - rear rail (max. spacing)	411 [mm]		
	Front rail - rear cover	501.2 [mm]		
Cabinet structure	Max. static load capacity	60 [kg]		
	Protection rating (according to EN 60529)	IP20		
Dimensions of the structure / elements (Length x Width x Height)	Door	Front	22 x 566 x 145.9 [mm]	
		Side	21.5 x 456 x 151.3 [mm]	
	Frame	Front	73 x 570 x 233 [mm]	
		Side	38.5 x 478 x 230.4 [mm]	
	Rear cover	70 x 570 x 233 [mm]		
	Mounting rail(s)	30.5 x 20.5 x 202.1 [mm]		
	Wall-mount rail	5.4 x 500 x 49.5 [mm]		
	Top and bottom panel	507.2 x 532.4 x 12.5 [mm]		
	Structure and other element(s) thickness	Door	Front	5 [mm]
			Glass Sheet metal	1 [mm]
Frame		Side	1 [mm]	
		Front	1 [mm]	
Side		1 [mm]		
Rear cover		1 [mm]		
Mounting rail(s)		1.2 [mm]		
Wall-mount rail		1.2 [mm]		
Top and bottom panel		1 [mm]		
Vents		Number	Top panel	4 [pcs]
	Bottom panel		4 [pcs]	
	Dimensions (Length x Width)	Top panel	120 x 120 [mm]	
		Bottom panel	120 x 120 [mm]	

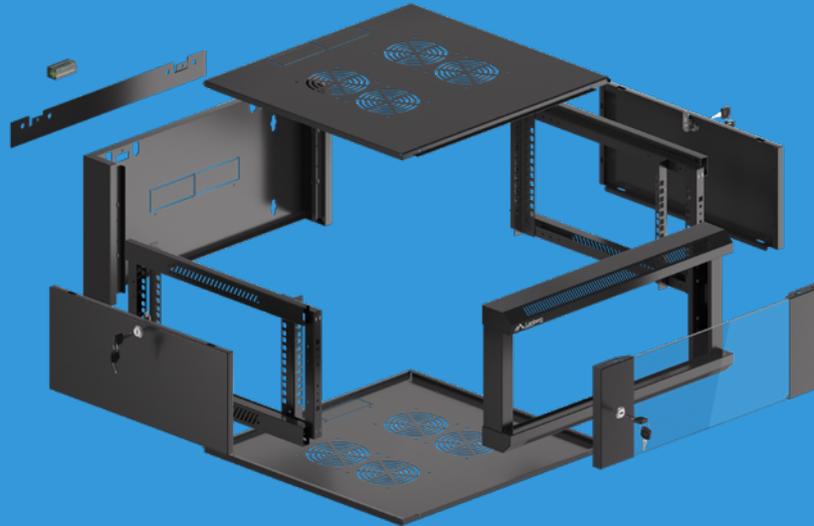

SPECIFICATION:

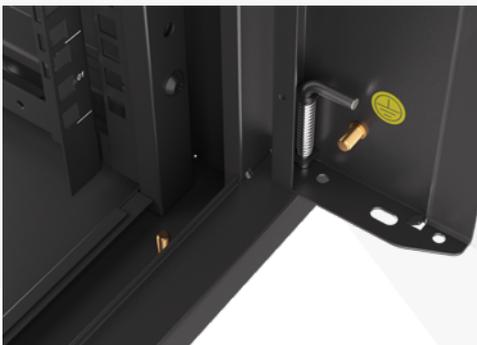

Cable entry panel(s)	Number	Top panel	1 [pcs]
		Bottom panel	1 [pcs]
		Rear cover	1 [pcs]
	Dimensions (Length x Width)	Top panel	45 x 230 [mm]
Bottom panel		45 x 230 [mm]	
Rear cover		45 x 230 [mm]	
Grounding pin(s)	Number	5 [pcs]	
	Diameter	6 [mm]	
Slots for anchors on a horizontal wall-mount rail	Number	4 [pcs]	
	Diameter	4 - ø 10	
Installation of vertical mounting rails on the frames of the cabinet	Number of mounting holes	5 [pcs] (from the front and rear)	
	Gap between the mounting holes	20 [mm]	
Additional information	Front door	Removable, with a grounding pin. Enable two-sided assembly and rotation up to 180°. Equipped with tempered glass and a fixed lock	
	Side door(s)	Removable, with grounding pin, steel, without latches. Equipped with a fixed lock	
	Front frame	Equipped with small, rectangular vents and 2 grounding pins	
	Side frame(s)	With small, rectangular vents	
Compliant with standards	RoHS	IEC 62321-4:2013 + A1:2017; IEC 62321-5:2013; IEC 62321-6:2015; IEC 62321-7-1:2015; IEC 62321-7-2:2017; IEC 62321-8:2017	
	RACK	EIA/ECA-310-E; IEC 60297-3-100:2008; IEC 60297-3-101:2004	
	Others	GB 15763.2-2005 (similar to EN 12150-1:2000 standard)	
Included accessories		<ul style="list-style-type: none"> ● Required Phillips screws for assembling the cabinet, ● Flat wall-mount rail, ● Portable level with magnet, ● 4 mounting rails with „U“ height indication, ● Front lock and a set of side locks (all factory-fitted in doors without latches), ● Set of 3 double identical keys (1 for front door, 2 for side door), ● 10 M6*12 Phillips screws including M6 cage nuts. 	
Logistic details	Packaging	Number	1 [pcs]
		Type	Flatpack
	EAN	5901969422016	
Color		Black (RAL 9004)	
Warranty		60 [months]	