

# PowerWalker VI 1200

Line-Interactive UPS System

1200VA Line-Interactive UPS

2x Schuko outlets + 2x IEC outlets, RJ11/RJ45 Surge Protection


USB Connection for monitoring

Cold start, built-in boost and buck AVR function

Green power function for energy saving



Item-No. 10120050

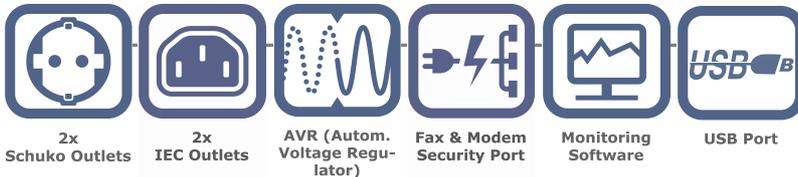

2x Schuko Outlets    2x IEC Outlets    AVR (Autom. Voltage Regulator)    Fax & Modem Security Port    Monitoring Software    USB Port

## Product Features

PowerWalker VI 1200 is a Line- Interactive UPS which provides high performance and reliable and cost-effective backup power protection. The UPS can be automatically started up without AC power supplied. In addition, this UPS provides RJ11/RJ45 surge protection, and green power function for energy saving. Equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or SMB (small medium business) application.

- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ11/RJ45 surge protection
- Monitoring software included
- LED Display show UPS status
- Green function for energy saving



Backside view



USB port, RJ11/RJ45 (in/out)



AC Input, fuse, 2x IEC and 2x Schuko outlet

## Technical Details

### Product Features

<b>Capacity</b>	1200VA/600W
<b>Input Voltage</b>	220/230/240VAC
<b>Input Voltage Range</b>	170-280VAC $\pm$ 7%
<b>Output Voltage</b>	220/230/240VAC
<b>Voltage Regulation (Battery Mode)</b>	$\pm$ 10%
<b>Output Frequency</b>	50Hz or 60Hz
<b>Frequency Regulation (Battery Mode)</b>	$\pm$ 1Hz
<b>Output Waveform</b>	Simulated Sine Wave

### Battery

<b>Type</b>	12V / 7Ah
<b>Quantity</b>	2x
<b>Recharge Time</b>	6h for 90% after complete discharge

### Transfer Time

<b>Typical</b>	4-8 ms
----------------	--------

### LED Indicators

<b>AC Mode</b>	green LED lighting
<b>Battery Mode</b>	yellow LED flashing

### Audio Indicators

<b>Battery Mode</b>	Beep every 10 sec
<b>Low Battery</b>	Beep every second
<b>Fault</b>	Continuous Beep
<b>Overload</b>	Beep every 0,5 sec

### Full Protection

<b>Discharge prevention</b>	Yes
<b>Deep discharger</b>	Yes
<b>Overcharge</b>	Yes
<b>Overload</b>	Yes

### Connections

<b>Interface</b>	USB
<b>Outlets</b>	2x Schuko, 2x IEC
<b>Surge Protection</b>	RJ11/RJ45 (in/out)

### Software & System Requirements

<b>Software</b>	WinPower
<b>Operating System</b>	For details visit: <a href="http://www.powerwalker.com/winpower.html">www.powerwalker.com/winpower.html</a>
<b>Other</b>	1x USB port

### Product Details

<b>Dimensions</b>	365 x 139 x 195 mm
<b>Colour</b>	Black
<b>Weight</b>	8.6 kg
<b>Noise Level</b>	No FAN inside
<b>Model Code</b>	VI 1200

### Environment

<b>Temperature</b>	0°C – 40°C
<b>Humidity</b>	0% - 90% RH (non-condensing)

### Package Content

<b>Package Content</b>	PowerWalker VI 1200, Input Power cable, IEC cable, USB cable, Software CD, manual
------------------------	---

### Logistic Data

<b>Giftbox Language</b>	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/CS
<b>Manual Language</b>	EN/DE/FR
<b>Dimension/Giftbox</b>	452 x 230 x 292 mm
<b>Weight/Giftbox</b>	t.b.c.
<b>Pieces/Carton</b>	1 pcs
<b>Pieces/Palette</b>	42pcs
<b>Item Number</b>	10120050
<b>EAN</b>	4260074975079
<b>Warranty</b>	24 Month (except battery)