

# PowerWalker VI 2200 LCD/FR

Line-Interactive UPS System

2200VA Line-Interactive UPS

2x French + 2x IEC outlets, RJ11/RJ45 Surge Protection


USB Connection for monitoring

Cold start, built-in boost and buck AVR function

LCD display for status view




Item-No. 10121003

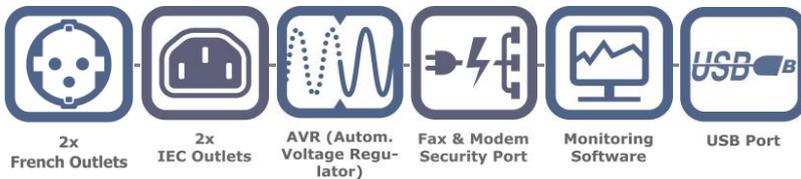

**Product Features**

PowerWalker VI 2200 LCD/FR is a Line- Interactive UPS which provides high performance and reliable and cost-effective backup power protection. The UPS can be automatically started up without AC power supplied. In addition, this UPS provides RJ11/RJ45 surge protection. Equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or SMB (small medium business) application.

- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ11/RJ45 surge protection
- Monitoring software included
- LCD Display show UPS status

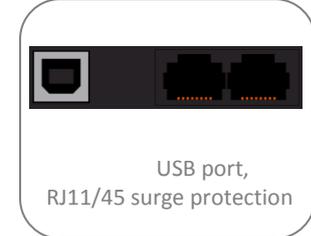

## Technical Details

### Product Features

Capacity	2200VA/1200W
Input Voltage	230 VAC
Input Voltage Range	170-280VAC $\pm$ 7%
Output Voltage	230 VAC
Voltage Regulation (Battery Mode)	$\pm$ 10%
Output Frequency	50Hz or 60Hz
Frequency Regulation (Battery Mode)	$\pm$ 1Hz
Output Waveform	Simulated Sine Wave

### Battery

Type	12V / 9Ah
Quantity	2x
Recharge Time	6h for 90% after complete discharge

### Transfer Time

Typical	4-8 ms
---------	--------

### LED Indicators

Indicators	AVR mode, Battery mode, Load level, Battery capacity, Input voltage, Output voltage, Overload alarm, Fault alarm, and Low battery alarm
------------	---

### Audio Indicators

Battery Mode	Beep every 10 sec
Low Battery	Beep every second
Fault	Continuous Beep
Overload	Beep every 0,5 sec

### Full Protection

Discharge prevention	Yes
Deep discharger	Yes
Overcharge	Yes
Overload	Yes

### Connections

Interface	USB
Outlets	2x French, 2x IEC
Surge Protection	RJ11/RJ45 (in/out)

### Software & System Requirements

Software	WinPower
Operating System	For details visit: <a href="http://www.powerwalker.com/winpower.html">www.powerwalker.com/winpower.html</a>
Other	1x USB port

### Product Details

Dimensions	365 x 139 x 195 mm
Colour	Black
Weight	10.4 kg
Fan Control	Auto OFF: in LINE mode and if internal voltage $\geq$ 13.4Vdc and load <50% ON: in battery mode, AVR mode and in LINE mode if load is >50%
Model Code	VI 2200 LCD/FR

### Environment

Temperature	0°C – 40°C
Humidity	0% - 90% RH (non-condensing)

### Package Content

Package Content	PowerWalker VI 2200 LCD/FR, Input Power cable, IEC cable, USB cable, Software CD, Manual
-----------------	--

### Logistic Data

Giftbox Language	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KZ/RS
Manual Language	EN/DE/FR/PL
Dimension/Giftbox	452 x 230 x 292 mm
Weight/Giftbox	11.1
Pieces/Carton	1pcs
Pieces/Palette	42 pcs
Item Number	10121003
EAN	4260074976540
Warranty	24 Month (except battery)



Optional Accessory:  
2x Yuasa 12V/9Ah battery  
Datasheet: [Link](#)  
CSB or Panasonic brand can also be used