




SB-052505- S [] -Z01- []

		<u>Stopień ochrony</u>
	54	IP54
	66	IP66
	<u>Nr wykonania rozdzielnic</u>	
	0010, 0020, 0030, 0040, 0050	
	0060	
	<u>Typ gniazda</u>	
S	Skośne	


* Standardowo montowane są gniazda skośne. Można zamówić gniazda proste wpisując literę "P" zamiast "S".

Napięcie znamionowe	400/230 V (50 Hz)
Napięcie znamionowe izolacji U_i	500 V
Napięcie znamionowe udarowe wytrzymałwalne U_{imp}	4 kV
Prąd znamionowy zestawu I_{nA}	16/32 A
Stopień ochrony	IP54 / IP66
Klasa ochronności	II
Przekrój przewodów przyłączeniowych	maks. 5× 6 mm ² (PG21)
Ilość modułów	5

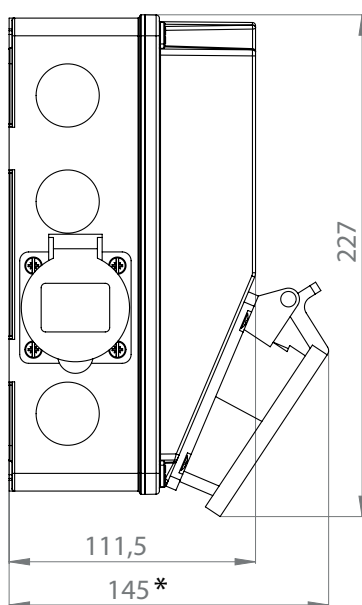


Technical drawing of the rear view of the device. The drawing shows a rectangular frame with a central horizontal bar. The overall width is dimensioned as 122 and the overall height as 96. The frame is composed of black lines, and the central bar is a thick black line. There are blue outlines of components, likely the camera and flash, at the top and bottom center. Small circles are located at the corners and along the central bar.


Wykonania




SB-052505-S0010-Z01




SB-052505-S0020-Z01




SB-052505-S0030-Z01



SB-052505-S0040-Z01



SB-052505-S0050-Z01



SB-052505-S0060-Z01