


SZ HH 1500 (765 042)

- 20° angled operating head for HH fuses that are not easily accessible

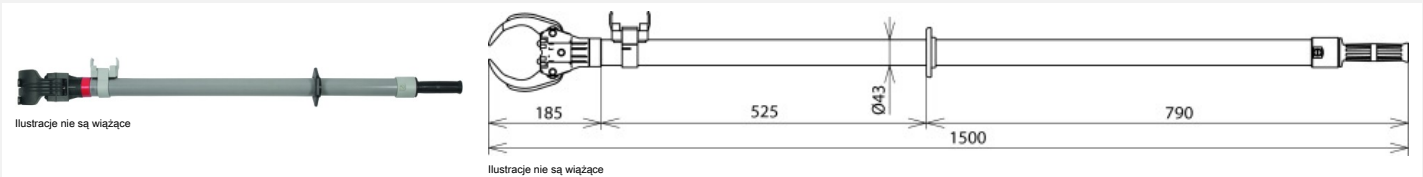

| Typ                                                  | SZ HH 1500                             |
|------------------------------------------------------|----------------------------------------|
| Nr kat.                                              | 765 042                                |
| Nominal voltage (U <sub>N</sub> )                    | 1 ... 36 kV                            |
| Clamping range                                       | 30 ... 50 <sup>1)</sup> / 50 ... 90 mm |
| Total length (l <sub>G</sub> )                       | 1500 mm                                |
| Insulating clearance (l <sub>i</sub> )               | 525 mm                                 |
| Length (handle) (l <sub>H</sub> )                    | 790 mm                                 |
| Insertion depth (l <sub>o</sub> )                    | 185 mm                                 |
| Standard                                             | DIN VDE V 0681-3                       |
| For use at                                           | ☀                                      |
| For                                                  | Indoor and outdoor installations       |
| Design                                               | Straight clamp body                    |
| Material (insulating stick)                          | Glass-fibre reinforced polyester tube  |
| Material (operating head)                            | Glass-fibre reinforced polyamide       |
| Material (reducing insert)                           | Polyamide                              |
| Material (adjustable handle)                         | Polyamide                              |
| Diameter                                             | 43 mm                                  |
| Colour                                               | Grey ☉                                 |
| Anti-rotation plug-in coupling including end fitting | No                                     |
| Type of device                                       | Fuse tong                              |
| Waga                                                 | 2,59 kg                                |
| Numer taryfy celnej (Nomenklatura scalona EU)        | 82055980                               |
| GTIN (EAN)                                           | 4013364093775                          |
| Jed. Op.                                             | 1 szt.                                 |

<sup>1)</sup> Only if used with reducing insert

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.