


ASPS 110 132 16.7 L (767 565)

- Insulating stick with plug-in coupling as end fitting for extending the handle
- In a suitable storage bag

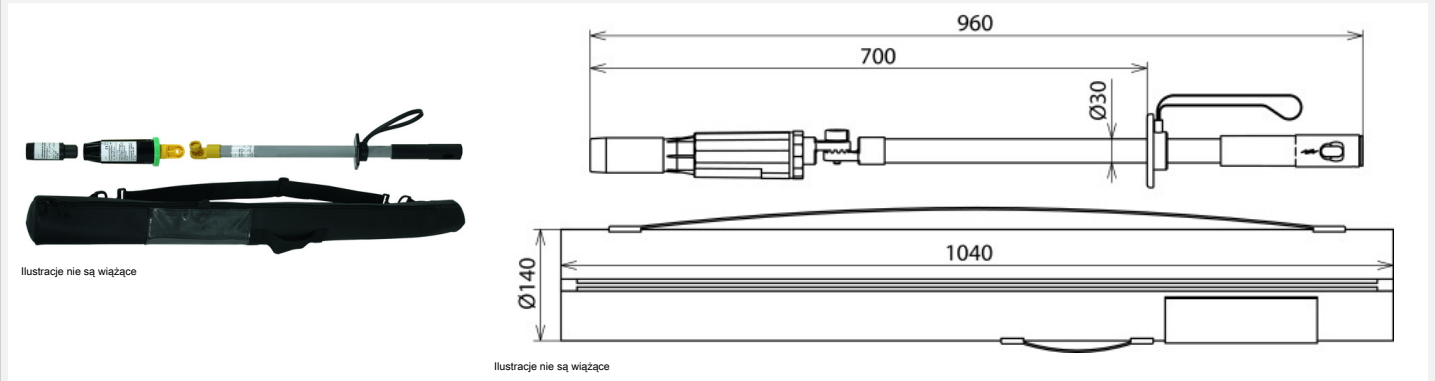

For contactlessly verifying that centre-earthed monophase traction power lines are dead

Typ	ASPS 110 132 16.7 L
Nr kat.	767 565
Nominal voltage (U _N)	110 ... 132 kV
Type of voltage	a.c.
Frequency	16.7 Hz
Total length (l _o)	960 mm
Category	L
DB drawing no.	3 Eku 710 002
Temperature range	−25 °C ... +55 °C
For use at	
For	Overhead lines and outdoor switching stations
Application	Overhead lines
Design	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (indicator)	Plastic, fully insulated (black)
Material (electric field sensor)	Plastic (black)
Material (insulating stick)	Glass-fibre reinforced polyester tube
Waga	2,03 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364143760
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.