


SCS 36 STK 1000 (763 100)

- For use as operating stick for inserting insulating protective shutters
- Handle termination with plastic plug-in coupling for extending the handle

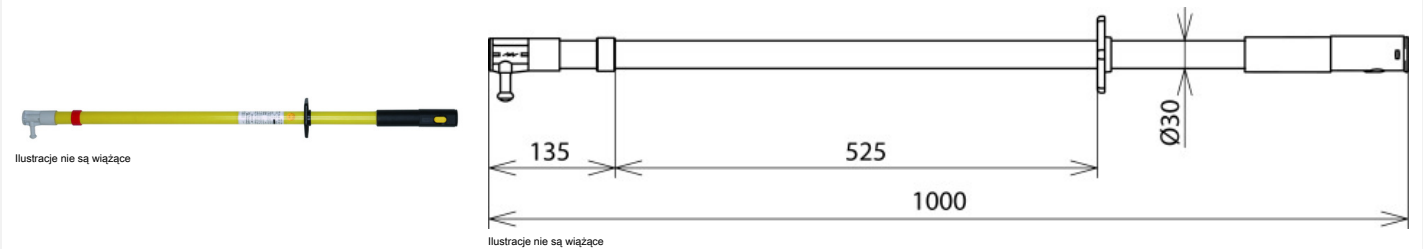

Typ	SCS 36 STK 1000
Nr kat.	763 100
Nominal voltage (U _N)	1 ... 36 kV
Max. load on the operating head	6 kg
Total length (l _o)	1000 mm
Insulating clearance (l _i)	525 mm
Length (handle) (l _h)	340 mm
Insertion depth (l _o)	135 mm
Standard (switching stick head)	DIN VDE V 0681-2
Standard (switching stick)	DIN VDE V 0681-1 and -2
Standard (insulating stick)	DIN VDE V 0681-1
For use at	*
For	For indoor and outdoor installations
Design	Fully insulated, massive switching stick head
Material (insulating tube)	Glass-fibre reinforced polyester tube
Material (switching pin)	Steel, plastic-sheathed
Diameter	30 mm
Anti-rotation plug-in coupling including end fitting	Yes
Type of device	Switching stick
Waga	600 g
Numer taryfy celnej (Nomenklatura scalona EU)	82055980
GTIN (EAN)	4013364125155
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.