


RST 36 2000 (766 042)

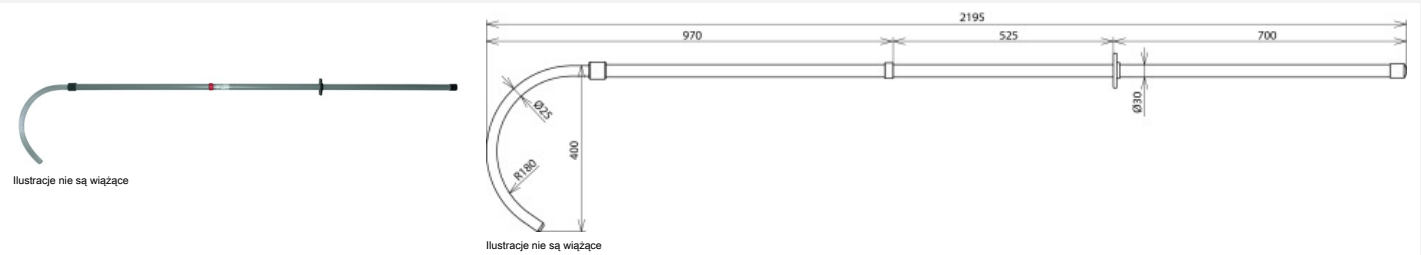

For rescuing persons from the live working zone in the event of an electrical accident

Typ	RST 36 2000
Nr kat.	766 042
Nominal voltage (U _n)	1 ... 36 kV
Max. weight of the electrified victim	100 kg
Total length (l _o)	2195 mm
Insertion depth (l _i)	970 mm
Length (handle) (l _h)	700 mm
Standard	Based on DIN VDE V 0681-1
For use at	☼
Material (hook)	PVC-HI solid stick
Material (insulating tube)	Glass-fibre reinforced polyester tube
For	Indoor and outdoor installations
Diameter	30 mm
Anti-rotation plug-in coupling including end fitting	No
Type of device	Rescue rod
Waga	1,12 kg
Numer taryfy celnej (Nomenklatura scalona EU)	82055980
GTIN (EAN)	4013364113060
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.