


SPN 500B (766 660)

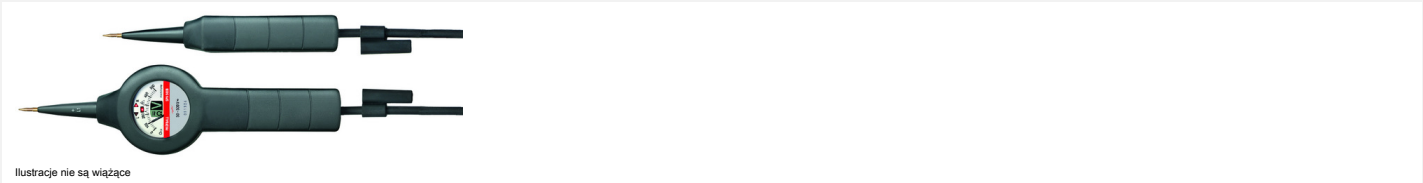

Typ Nr kat.	SPN 500B 766 660
Nominal voltage range (U _N)	50 ... 500 V
Frequency range	15 ... 500 Hz and DC
Dimensions (indicator)	274 x 75 x 47 mm
Standard	EN/IEC 61243-3 (DIN VDE 0682-401)
Temperature range	-15 °C ... +45 °C
Material (indicator)	Safety enclosure made of solid rubber
Indicator	Direct-reading instrument, LCD and LED
Connecting cable	PUR-sheathed cable, highly flexible, 1000 mm
Overvoltage category	CAT IV 500 V
Type	Two-pole
Battery	Lithium
For	Indoor and outdoor installations
Degree of protection	IP 65
For use at	
Waga	460 g
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364302464
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.