


PHG2 10 (766 710)

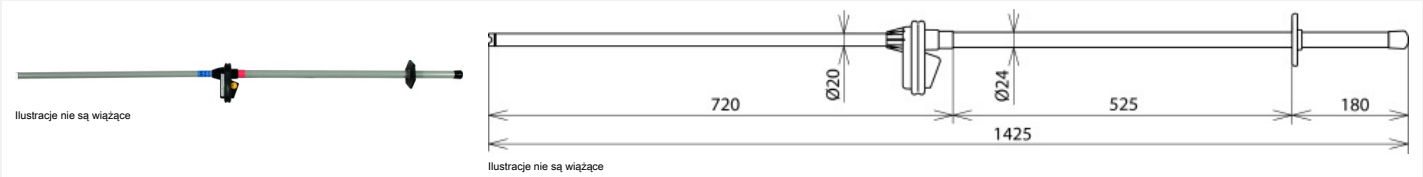

Category "S" for indoor switching stations

Typ	PHG2 10
Nr kat.	766 710
Nominal voltage (U _N)	10 kV
Type of voltage	a.c.
Frequency	50 Hz
Total length (l _o)	1425 mm
Insertion depth (l _i)	720 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	*
For	Indoor installations
Application	Switchgear installations
Type	Single-pole
Indication	Visual, 3 LEDs
Function	Passive voltage detector without batteries
Material (test electrode)	Cu/gal Sn
Material (test prod)	Glass-fibre reinforced polyester tube
Material (indicator)	Plastic
Material (insulating stick)	Glass-fibre reinforced polyester tube
Waga	1,7 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364094314
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.