



NILOÉ™
NP2411BK/MG/WH

legrand®

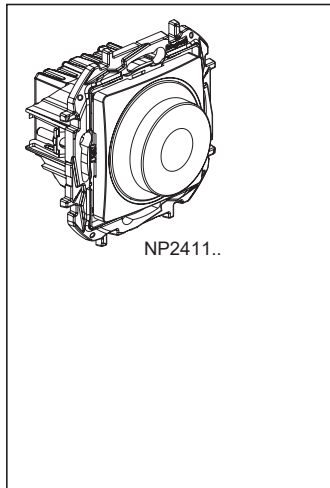

			U f	
-10°C ... +70°C	-5°C ... +40°C	40 mm	100 .. 240 V~ 50 / 60 Hz	8 mm 1...2,5 mm²

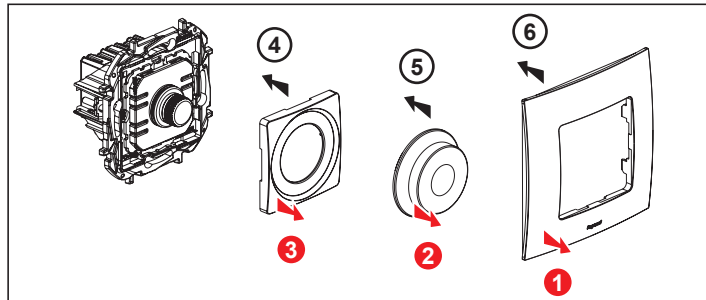

	R		L		C/L		C/L	
200-240V~ 50/60Hz	5...300 W		5... 300 VA	5... 300 VA	5... 300 VA	5... 300 VA	5...75 W ≤ 10 x	5...37 W ≤ 10 x
100-200V~ 50/60Hz	5...150 W		5... 150 VA	5... 150 VA	5... 150 VA	5... 150 VA	5...75 W ≤ 10 x	5...37 W ≤ 10 x

