


Niloé™ Step Roller Blind

Cat. No(s): 8 631 43/44 - 8 633 43/44
8 634 43/44 - 8 635 43/44




1. USE

Shutter controls mechanisms 250 V~.
Mechanisms supplied with protection cover.
To be equipped with plates one or several gangs.
Flush-mounting or surface-mounting.
Screw or claw fixing.

2. RANGE

Description	White	Aluminium	Grey	Black
Roller blind push-button 6 A - 250 V~	8 631 43	8 633 43	8 634 43	8 635 43
Roller blind switch 10 AX - 250 V~	8 631 44	8 633 44	8 634 44	8 635 44

3. DIMENSIONS (mm)

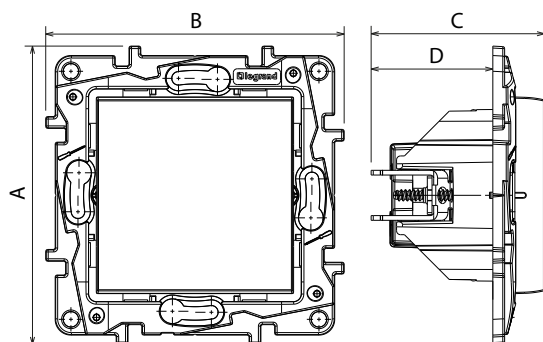

A	B	C	D
75.8	75.8	44	31

4. CONNECTION

Type of terminals: screws
Capacity: 2 x 2.5 mm²
Stripping length: 8 mm
Flexible or rigid cables compatible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
Protection against impact: IK 04

■ 5.2 Material characteristics

Material : - Mechanism housing: PC

- Rocker plate: ABS

- Halogen free

- UV resistant

- Claws: steel

Material of the support: - PC + FV

- Halogen free

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for other insulating components

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 6 A for 8 63x 43

10 AX for 8 63x 44

Maximum power on integrated ballast lamps: 100 W

Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Usage temperature: -5°C to +35°C

Storage temperature: -10°C to +70°C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.