



Niloé™ STEP Roller Blind

**Cat. No(s): 3 981 44B - 3 982 44B/45B/46B - 3 984 43B/44B
3 985 43B/44B - 8 63X 43B - 8 63X 44B**



3 982 44B/45B/46B



3 98X 43B/44B,
8 63X 43B/44B


1. USE

Shutter controls mechanisms 250 V~.
To be equipped with plates one or several gangs.
Flush-mounting or surface-mounting.
Screw or claw fixing.

2. RANGE

Description	White	Aluminium	Medium Grey	Black
Roller blind push-button 6 A - 250 V~	8 631 43B	8 633 43B	3 984 43B, 8 634 43B	3 985 43B, 8 635 43B
Roller blind switch 10 AX - 250 V~	3 981 44B, 8 631 44B	8 633 44B	3 984 44B, 8 634 44B	3 985 44B, 8 635 44B
Roller blind switch 3 pos (2M meca)	3 982 44B	3 982 45B	-	3 982 46B

3. DIMENSIONS (mm)

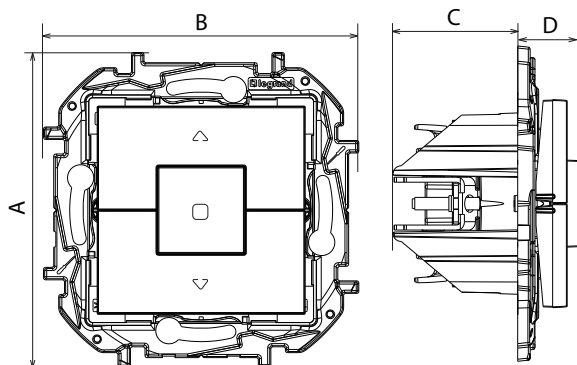

References	A	B	C	D
3 982 44B/45B/46B	75.8	75.8	30	14.6
3 98X 43B, 8 63X 43B	75.8	75.8	30	13.2
3 98X 44B, 8 63X 44B	75.8	75.8	30	13

4. CONNECTION

Type of terminals: screws or automatic
Screws: 3 98X 43B, 3 98X 44B, 8 63X 43B/44B
Automatic: 3 982 44B/45B/46B
Capacity: 2 x 2.5 mm²
Stripping length: - 3 98X 43B, 3 98X 44B, 8 63X 43B/44B 8 mm
- 3 982 44B/45B/46B 13 mm
Flexible or rigid cables compatible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
Protection against impact: IK 04

■ 5.2 Material characteristics

Mat appearance

Material : - Mechanism housing: PC

- Rocker plate: ABS

- Halogen free

- Claws: steel

Material of the support: - PC + GF

- Halogen free

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for other insulating components

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 6 AX for 3 982 44B/45B/46B,

6 A 3 98X 43B, 8 63X 43B

10 AX for 3 98X 44B, 8 63X 44B

Maximum power on integrated ballast lamps: 100 W

Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Storage temperature: - 10° C to +70° C

Usage temperature: - 5° C to + 40° C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos 3 981 44B - 3 982 44B - 3 982 45B - 3 982 46B - 3 984 43B - 3 984 44B - 3 985 43B - 3 985 44B - 8 631 43B - 8 631 44B - 8 633 43B - 8 633 44B - 8 634 43B - 8 634 44B - 8 635 43B - 8 635 44B) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue