


# Niloé™

## **Socket outlets - French Standard**

Cat. No(s): NP3100BK/MG/WH, NP3101BK/MG/WH, NP3102BK/MG/WH, NP3106RD, NP3107RD

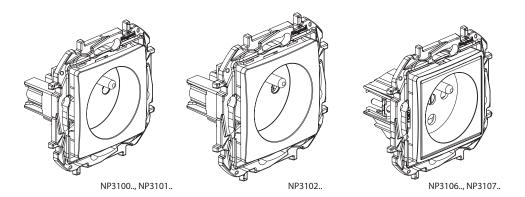

#### 1. USE

Socket outlets with shutters.

Mechanisms supplied with protection cover.


To be equipped with plates one or several gangs.

Flush-mounting or surface-mounting.

Screw or claw fixing.

2. RANGE					
Description	White	Medium Grey	Black	Red	
2P+E socket automatic terminal	NP3100WH	NP3100MG	NP3100BK	-	
2 P+E socket screw terminal	NP3101WH	NP3101MG	NP3101BK	-	
2 P+E socket shutters screw terminal	NP3102WH	NP3102MG	NP3102BK	-	
2P+E socket shutters screw terminal	-	-	-	NP3106RD	
2 P+E socket shutters tamperproof screw terminal	-	-	-	NP3107RD	

# 3. DIMENSIONS (mm)



Α	В	С	D
75.8	75.8	30.2	10.2

# 4. CONNECTION

Capacity: 2 x 2.5 mm<sup>2</sup>
Flexible or rigid cables compatible
Type of terminals: automatic
Stripping length:
12 mm NP3100..
10 mm NP3101.., NP3102.., NP3106.., NP3107..

# 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20 Protection against impact: IK 04

# ■ 5.2 Material characteristics

Polygloss appearance

Material: - Mechanism housing + Support: PC+SUP

- Claws: steel

### Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place
- $+\,650^{\circ}\,\text{C}\,/\,30\,\text{s}$  for other parts made of insulating materials

### ■ 5.3 Electrical characteristics

Voltage: 250 V~ Current: 16 A Frequency: 50/60 Hz

### ■ 5.4 Climatic characteristics

Storage temperature: -  $10^{\circ}$  C to  $+70^{\circ}$  C Usage temperature: -  $5^{\circ}$  C to  $+40^{\circ}$  C

# 6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

### 7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos NP3100BK/MG/WH - NP3101BK/MG/WH - NP3102BK/ MG/WH - NP3106RD - NP3107RD) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue

Created: 27/09/2024 **L7 legrand** 

Technical data sheet: F04329EN/00 Updated: 27/09/2024