


Niloe™

Cat. Nos: NP3302BK/MG/WH

2 P+E socket flush surface + USB Type C mixed socket outlet



NP3302..

1. USE

2 P+E socket outlets with shutter.

USB Type C socket: for recharging portable devices such as phones, smartphones, tablets, MP3, MP4, loudspeakers, watches, game consoles, powerbanks.


Recessed mounting in box depth 40 mm min.

Fixing with screws and/or claws.

2. RANGE

Description	White	Medium Grey	Black
2 P+E socket + USB socket type C	NP3302WH	NP3302MG	NP3302BK

3. DIMENSIONS (mm)

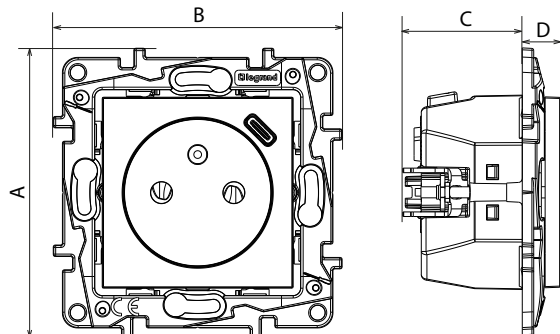

A	B	C	D
75.8	75.8	31.3	10.2

4. CONNECTION

4.1 2 P+E socket outlet

Type of terminals: automatics

Terminal capacity: 1.5 mm² - 2.5 mm²

Stripping length: 11 mm

Flexible or rigid cables compatible

4.2 Type C USB socket

Prewired socket

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Protection against impact: IK 04

Protection against solid bodies and liquids: IP 40

5.2 Material characteristics

Polygloss appearance

Mechanism casing: PC

5. TECHNICAL CHARACTERISTICS (continued)

Cover plate: PC molded White

PC painted Black

Support: PC grey + metal

Claws: Steel

Halogen-free

UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for other insulating components.

5.3 Electrical characteristics 2 P+E socket

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

5.4 Electrical characteristics USB socket

Integrated surge protection

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Connector	USB Type C
Nominal input voltage	250 V~
Nominal input frequency	50-60 Hz
Nominal input current	200 mA
Stand-by power consumption	0.07 W - 0.075 mA
Average active efficiency	82 %
Nominal output voltage	5 V=
Nominal output current	1.5 A
Efficiency can meet energy star level "VI" (≥ 76% measured at USB socket output side)	
Safety standard	EN62368-1
Protection class	II - Low voltage

5. TECHNICAL CHARACTERISTICS *(continued)*

- **5.5 Climatic characteristics**
Storage temperature: - 10° C to +70° C
Usage temperature: - 5° C to + 40° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos NP3302BK/MG/WH) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue