


Niloe™

Cat. Nos: NP3312BK/MG/WH

2 P+E + USB Type C mixed socket outlet



NP3312..

1. USE

2 P+E socket outlets with shutter.

USB Type C socket: for recharging portable devices such as phones, smartphones, tablets, MP3, MP4, loudspeakers, watches, game consoles, powerbanks.


Recessed mounting in box depth 40 mm min (Multi-station compatible box).

Fixing with screws and/or claws.

2. RANGE

| Description | White | Medium Grey | Black |
|--|----------|-------------|----------|
| Mixed socket composed of: - 2 P+E socket - 16 A - 250 V~ - single USB socket - 5 V= - 1.5 A - 7.5 W Supplied with support and cover plate. German standard | NP3312WH | NP3312MG | NP3312BK |

3. DIMENSIONS (mm)

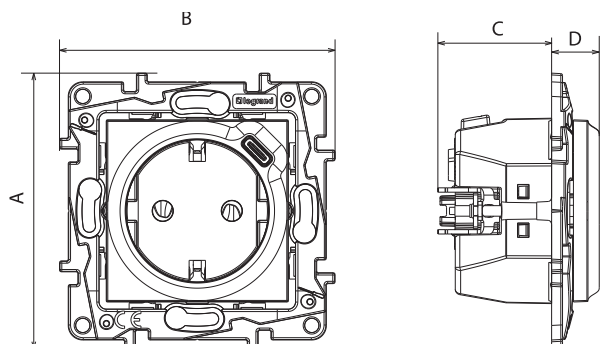

| A | B | C | D |
|------|------|------|------|
| 75.8 | 75.8 | 31.3 | 13.1 |

4. CONNECTION

■ 4.1 2 P+E socket outlet

Type of terminals: automatics

Terminal capacity: 1.5 mm² - 2.5 mm²

Stripping length: 11 mm

Flexible or rigid cables compatible

■ 4.2 Type C USB socket

Prewired socket

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against impact: IK 04

Protection against solid bodies and liquids: IP 40

■ 5.2 Material characteristics

Polygloss appearance

Mechanism casing: PC

Cover plate: PC molded White

PC painted Black

Support: PC grey + metal

Claws: Steel

UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics 2 P+E socket

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

■ 5.4 Electrical characteristics USB socket

Integrated surge protection

All values listed below are measured at an ambient temperature of + 25° C and after 15 minutes of operation.

■ 5.5 Climate characteristics

Storage temperature: - 10° C to +70° C

Usage temperature: - 5° C to + 40° C

| | |
|---|------------------|
| Connector | USB Type C |
| Nominal input voltage | 250 V~ |
| Nominal input frequency | 50-60 Hz |
| Nominal input current | 200 mA |
| Standby power consumption | 0.07 W - 0.075 W |
| Average active efficiency | 82 % |
| Nominal output voltage | 5 V= |
| Nominal output current | 1.5 A |
| Efficiency can meet energy star level "VI" (≥ 76% measured at USB socket output side) | |
| Safety standard | EN62368-1 |
| Protection class | II - Low voltage |

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos NP3312BK/MG/WH) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue