



Niloé™

Socket outlets - German Standard


**Cat. No(s): NP3120BK/MG/WH, NP3121BK/MG/WH,
NP3122BK/MG/WH, NP3129BK/MG/WH, NP3199BK/MG/WH**



NP3120.., NP3121,
NP3122..



NP3129..



NP3199..


1. USE

Socket outlets with or without shutters.
Mechanisms supplied with protection cover.
To be equipped with plates one or several gangs.
Flush-mounting.
Screw or claw fixing.

2. RANGE

Description	White	Medium Grey	Black
2 P+E socket shuttered automatic terminal	NP3120WH	NP3120MG	NP3120BK
2 P+E socket screw terminal	NP3121WH	NP3121MG	NP3121BK
2P+E socket shuttered screw terminal	NP3122WH	NP3122MG	NP3122BK
2P+E socket flap shuttered screw terminal	NP3129WH	NP3129MG	NP3129BK
2 P socket screw terminal	NP3199WH	NP3199MG	NP3199BK

3. DIMENSIONS (mm)

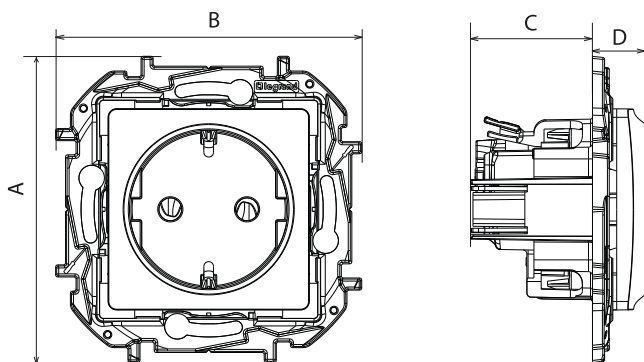

References	A	B	C	D
NP3120.., NP3121.., NP3122..	75.8	75.8	30.2	13
NP3129..	75.8	75.8	30.2	17.1
NP3199..	75.8	75.8	30.2	10.2

4. CONNECTION

Terminal capacity: 2 x 2.5 mm²

Type of terminals:

Automatic terminal: NP3120..

Screw terminal: NP3121.., NP3122.., NP3129.., NP3199..

Stripping length:

12 mm NP3120..

10 mm NP3121.., NP3122.., NP3129.., NP3199..

Flexible or rigid cables compatible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20

Protection against impact: IK 04

■ 5.2 Material characteristics

Polygloss appearance

Mechanism housing: PC

Cover plate: PC

UV-resistant

Claws: steel

Support: PC

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place

650°C/30 s for other insulating components

5. TECHNICAL CHARACTERISTICS (continued)

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Storage temperature: - 10° C to +70° C

Usage temperature: - 5° C to + 40° C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane, methylated spirit, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products.

Caution: Always test before using other special cleaning products

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos NP3120BK/MG/WH - NP3121BK/MG/WH - NP3122BK/MG/WH - NP3129BK/MG/WH - NP3199BK/MG/WH) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue