



Niloe™

Cat. No(s): NP3113BK/MG/WH, NP3114BK/MG/WH

Socket outlets - French Standard

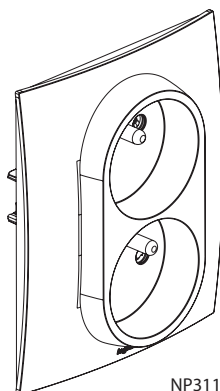

NP3113..

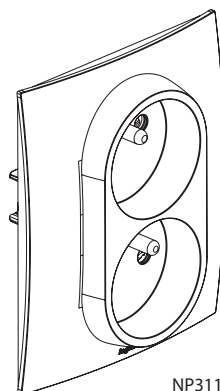

NP3114..


1. USE

Socket outlets with or without shutters.
Mechanisms supplied with protection cover.
To be equipped with plates one or several gangs.
Flush-mounting or surface-mounting.
Screw or claw fixing.

2. RANGE

Description	White	Medium Grey	Black
2 P+E socket screw terminal	NP3113WH	NP3113MG	NP3113BK
2 P+E socket shutters screw terminal	NP3114WH	NP3114MG	NP3114BK

3. DIMENSIONS (mm)

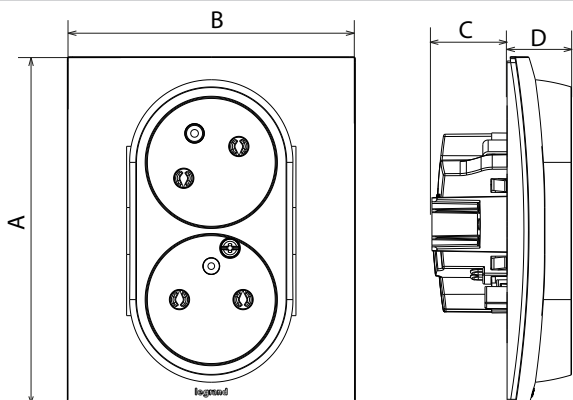			
A	B	C	D
104	84	22.5	19.1

4. CONNECTION

Capacity: 2 x 2.5 mm²
Flexible or rigid cables compatible
Type of terminals: automatic
Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
Protection against impact: IK 04

■5.2 Material characteristics

Polygloss appearance
Material : - Mechanism housing + Support: PC+SUP
- UV resistant
- Claws: steel

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place
+ 650° C / 30 s for other parts made of insulating materials

■5.3 Electrical characteristics

Voltage: 250 V~
Current: 16 A
Frequency: 50/60 Hz

■5.4 Climatic characteristics

Storage temperature: - 10° C to +70° C
Usage temperature: - 5° C to + 40° C

6. MAINTENANCE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos NP3113BK/MG/WH - NP3114BK/MG/WH) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue