


## Niloe™ Fan controller

Cat. No(s): NP660BK/MG/WH



NP660..


### 1. USE

Rotary speed controller for fan.

### 2. RANGE

Description	White	Medium Grey	Black
VENTILATION CONTROL SWITCH (0,1,2,3)	NP660WH	NP660MG	NP660BK

### 4. DIMENSIONS (mm)

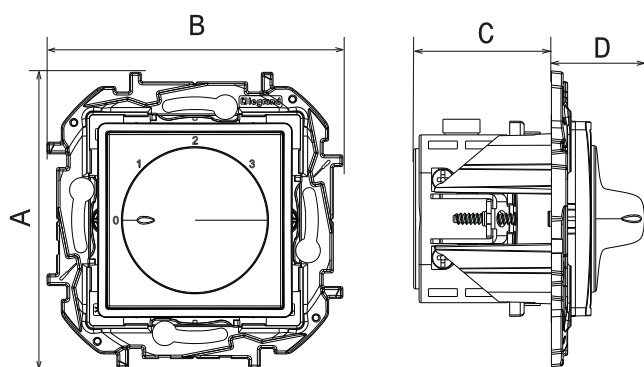

A	B	C	D
75.8	75.8	35.3	23.8

### 5. CONNECTION


Flexible or rigid cables compatible.


Type of terminals:  
Screw terminal

Terminal capacity:  
2 x 2.5mm<sup>2</sup>/terminal

Stripping length:  
8mm

#### ■ 5.1 Wiring

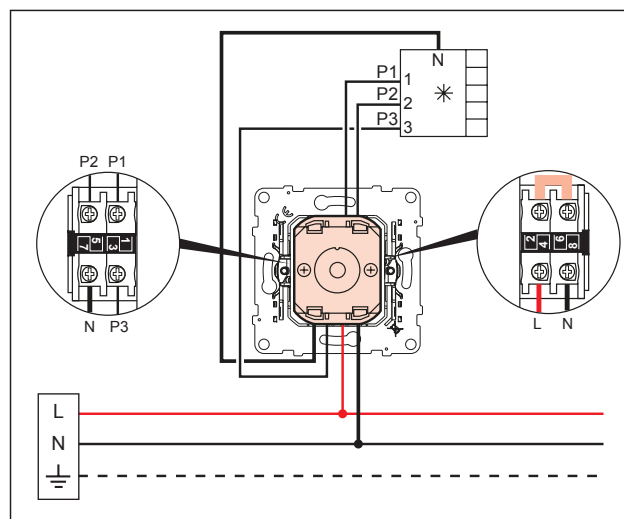

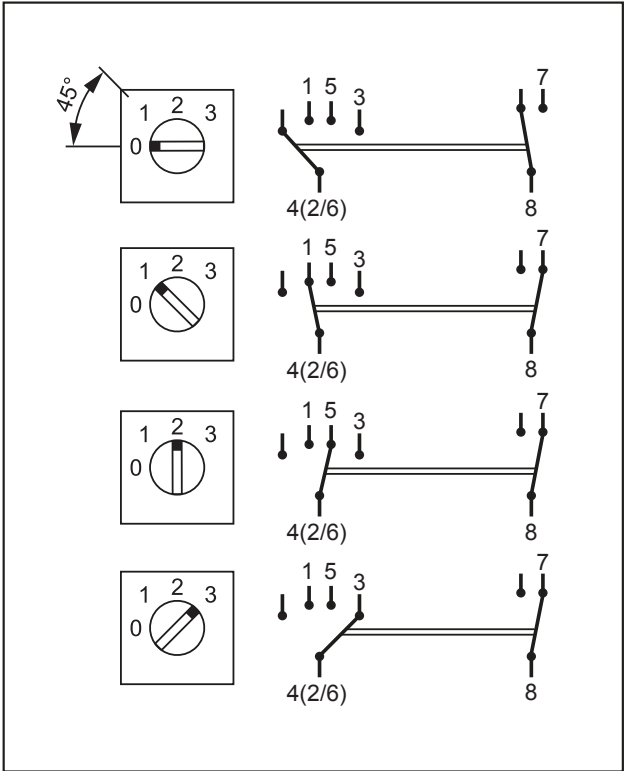

## 6. TECHNICAL CHARACTERISTICS

### ■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP20  
Protection against impact: IK04

### ■ 6.2 Material characteristics

Material:

- Plate ABS
- Socket covers: Polycarbonate
- Halogen-free
- UV resistant

Self-extinguishing:

850°C/30 s for installing components holding live parts in place  
650°C/30 s for other insulating components

### ■ 6.3 Electrical characteristics

Voltage: 250 V~  
Current: AC23A 2,5kW  
AC21A 20 A  
Frequency: 50/60 Hz

### ■ 6.4 climatic characteristics

Storage temperature: - 10° C to +70° C  
Usage temperature: - 5° C to + 40° C

## 7. MAINTENANCE

Surface cleaning with a cloth.

Do not use:

Acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

**Caution:** Always test before using other special cleaning products.

## 8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos NP660BK/MG/WH) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: [www.legrand.com/ecatalogue](http://www.legrand.com/ecatalogue)