



**Niloé™**

## Lighting controls with mosaic adapter


**Cat. No(s): NP2010BK/MG/WH, NP2020BK/MG/WH,  
NP2113BK/MG/WH, NP2130BK/MG/WH**




NP2010..



NP2020..



NP2113..



NP2130..


### 1. USE

Lighting controls mechanisms.  
Flush or surface mounting.  
Screw and claw fixing.  
To be fitted with one-gang or multi-gang plates.

### 2. RANGE

Description	White	Medium Grey	Black
Intermediate switch	NP2010WH	NP2010MG	NP2010BK
Double intermediate switch	NP2020WH	NP2020MG	NP2020BK
One-way two-gang switch	NP2113WH	NP2113MG	NP2113BK
One-way three-gang switch	NP2130WH	NP2130MG	NP2130BK

### 3. DIMENSIONS (mm)

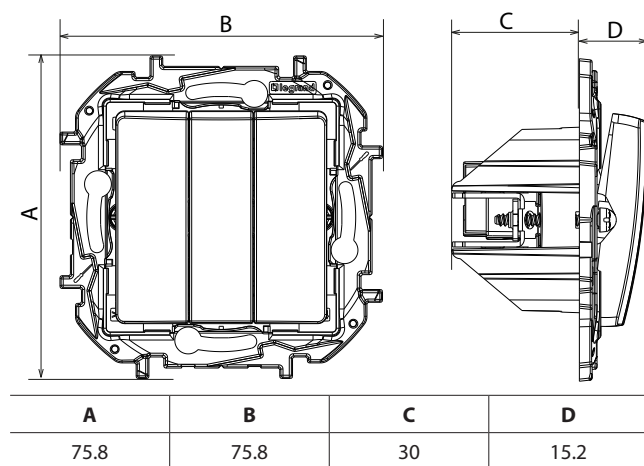

### 4. CONNECTION

Type of terminals: screws  
Terminal capacity: NP2010.., NP2020.., NP2113.. : 2 x 2.5 mm<sup>2</sup>  
NP2130.. : 4 mm<sup>2</sup>  
Stripping length: NP2020.. 9 mm  
NP2010.., NP2113.., NP2130.. 10 mm

Compatible with flexible or rigid cables.

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20  
Protection against mechanical impact: IK 04

#### ■ 5.2 Material characteristics

Polyglass appearance  
Mechanism casing: PC  
Halogen-free  
Claws: steel

Support frame: PC + GF  
Halogen-free

Self-extinguishing:  
850°C/30 s for insulating components holding live parts in place.  
650°C/30 s for other insulating components.

#### ■ 5.3 Electrical characteristics

**NP2010.., NP2020.., NP2113..**

Voltage: 250 V~  
Current: 10 AX  
Maximum power on integrated ballast lamps: 200 W  
Frequency: 50/60 Hz

**NP2130..**

Voltage: 250 V~  
Current: 20 AX  
Maximum power on integrated ballast lamps: 200 W  
Frequency: 50/60 Hz

#### ■ 5.4 Climate characteristics

Storage temperature: -10°C to + 70°C  
Usage temperature: -5°C to + 40°C

5. TECHNICAL CHARACTERISTICS (continued)

6. CLEANING

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichloroethylene.  
Maintenance with the following products:  
Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
Refer to e. catalogue.  
The undersigned, LEGRAND, declares that the radio-electric equipment

**Caution:** Always test before using special cleaning products.

type (Cat. Nos NP2010BK/MG/WH - NP2020BK/MG/WH - NP2113BK/MG/WH - NP2130BK/MG/WH) complies with directive 2014/53/EU.  
The full text of the EU declaration of conformity is available on the following website: [www.legrand.com/ecatalogue](http://www.legrand.com/ecatalogue)