


## Niloe™ STEP

### Blanking plate, mosaic adaptor

Cat. Nos: 3 983 06B - 3 983 07B - 3 983 08B - 3 984 00B - 8 631 00B -  
8 633 00B - 8 634 00B - 8 635 00B - 8 641 79B - 8 643 79B -  
8 645 79B - 8 646 79B - 8 631 89B - 8 633 89B - 8 634 89B - 8 635 89B

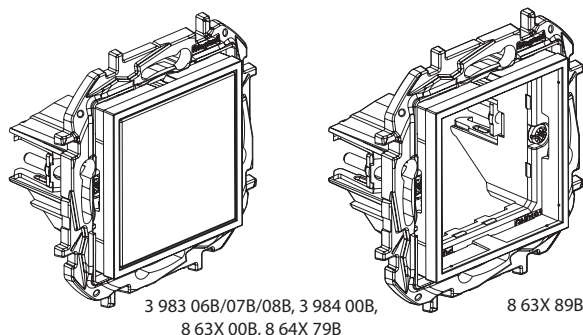


#### 1. USE

The mechanisms are supplied with cover plates and support frames. Flush-mounting or surface-mounting.  
Fixing with screws and or with claws.

#### 2. RANGE

| Designation    | White                              | Aluminium                          | Medium Grey             | Black                              | Sand      |
|----------------|------------------------------------|------------------------------------|-------------------------|------------------------------------|-----------|
| Blanking plate | 3 983 06B, 8 631 00B,<br>8 641 79B | 3 983 07B, 8 633 00B,<br>8 643 79B | 3 984 00B,<br>8 634 00B | 3 983 08B, 8 635 00B,<br>8 645 79B | 8 646 79B |
| Mosaic adaptor | 8 631 89B                          | 8 633 89B                          | 8 634 89B               | 8 635 89B                          | -         |

#### 3. DIMENSIONS (mm)

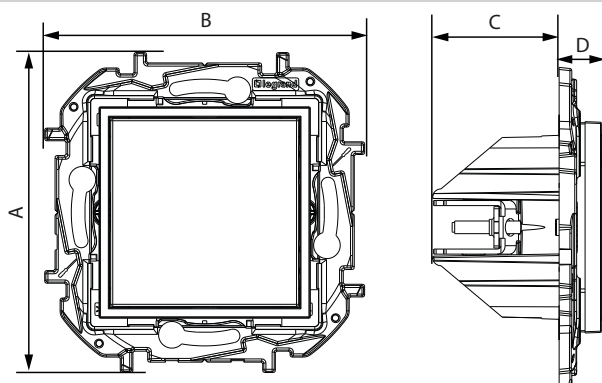

| References                                            | A    | B    | C  | D    |
|-------------------------------------------------------|------|------|----|------|
| 3 983 06B/07B/08B, 3 984 00B,<br>8 63X 00B, 8 64X 79B | 75.8 | 75.8 | 30 | 10.2 |
| 8 63X 89B                                             | 75.8 | 75.8 | 30 | 10   |

#### 4. TECHNICAL CHARACTERISTICS

##### ■ 4.1 Mechanical characteristics

Protection against solide bodies and liquids: IP 20  
Protection against impacts: IK 04

##### ■ 4.2 Material characteristics

Mat appearance

Material: - Cover plate: painted PC  
- Halogen-free  
- UV resistant

Material of the support: - PC grey RAL 7016 + 10 % glass fiber  
- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place  
+ 650° C / 30 s for other parts made of insulating materials

#### 4. TECHNICAL CHARACTERISTICS (continued)

##### ■ 4.4 Climatic characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +40°C

#### 5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the cleaning agents: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substances, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

#### 5. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos: 3 983 06B - 3 983 07B - 3 983 08B - 3 984 00B - 8 631 00B - 8 633 00B - 8 634 00B - 8 635 00B - 8 641 79B - 8 643 79B - 8 645 79B - 8 646 79B - 8 631 89B - 8 633 89B - 8 634 89B - 8 635 89B) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: [www.legrand.com/ecatalogue](http://www.legrand.com/ecatalogue)