


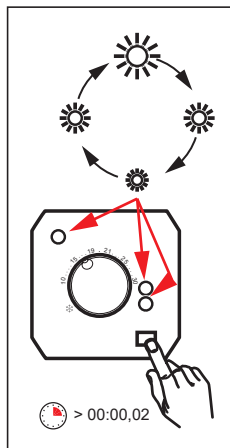
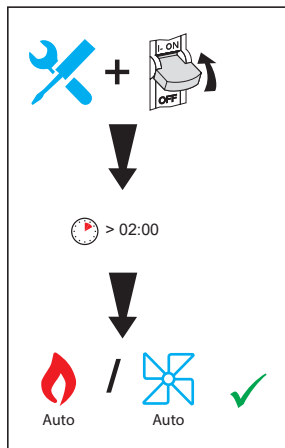
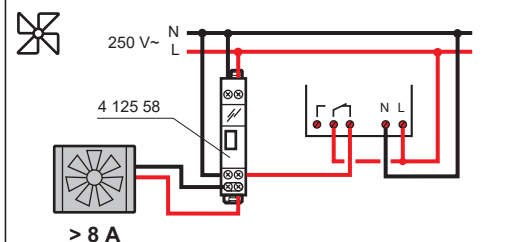
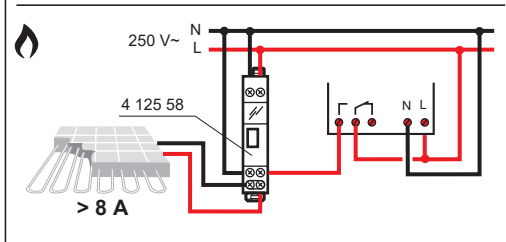
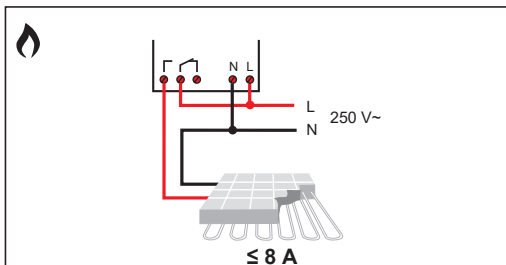
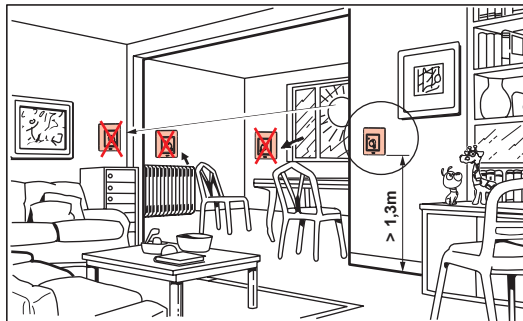
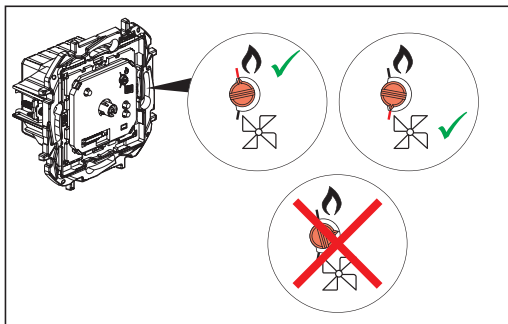


NILOÉ™
 NP670MG/BK/WH, NP671MG/BK/WH


 NP670 NP671	 -10°C ... +70°C	 -5°C ... +40°C	 10°C ... 30°C $\Delta K = \pm 2K$	 250 V~ 8 A, $\cos \varphi = 1$ 2 A, $\cos \varphi = 0,6$	 6 mm 1,5..4 mm² 1,5..2,5 mm²
	P	U, f			
	< 1 W	230 V~ 50 / 60 Hz			


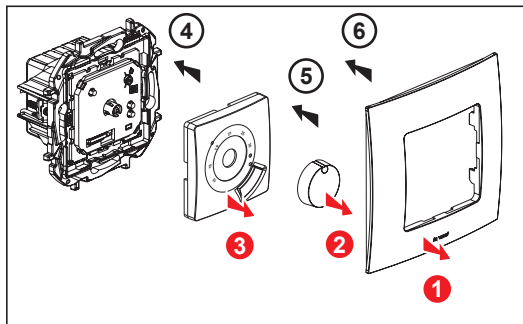


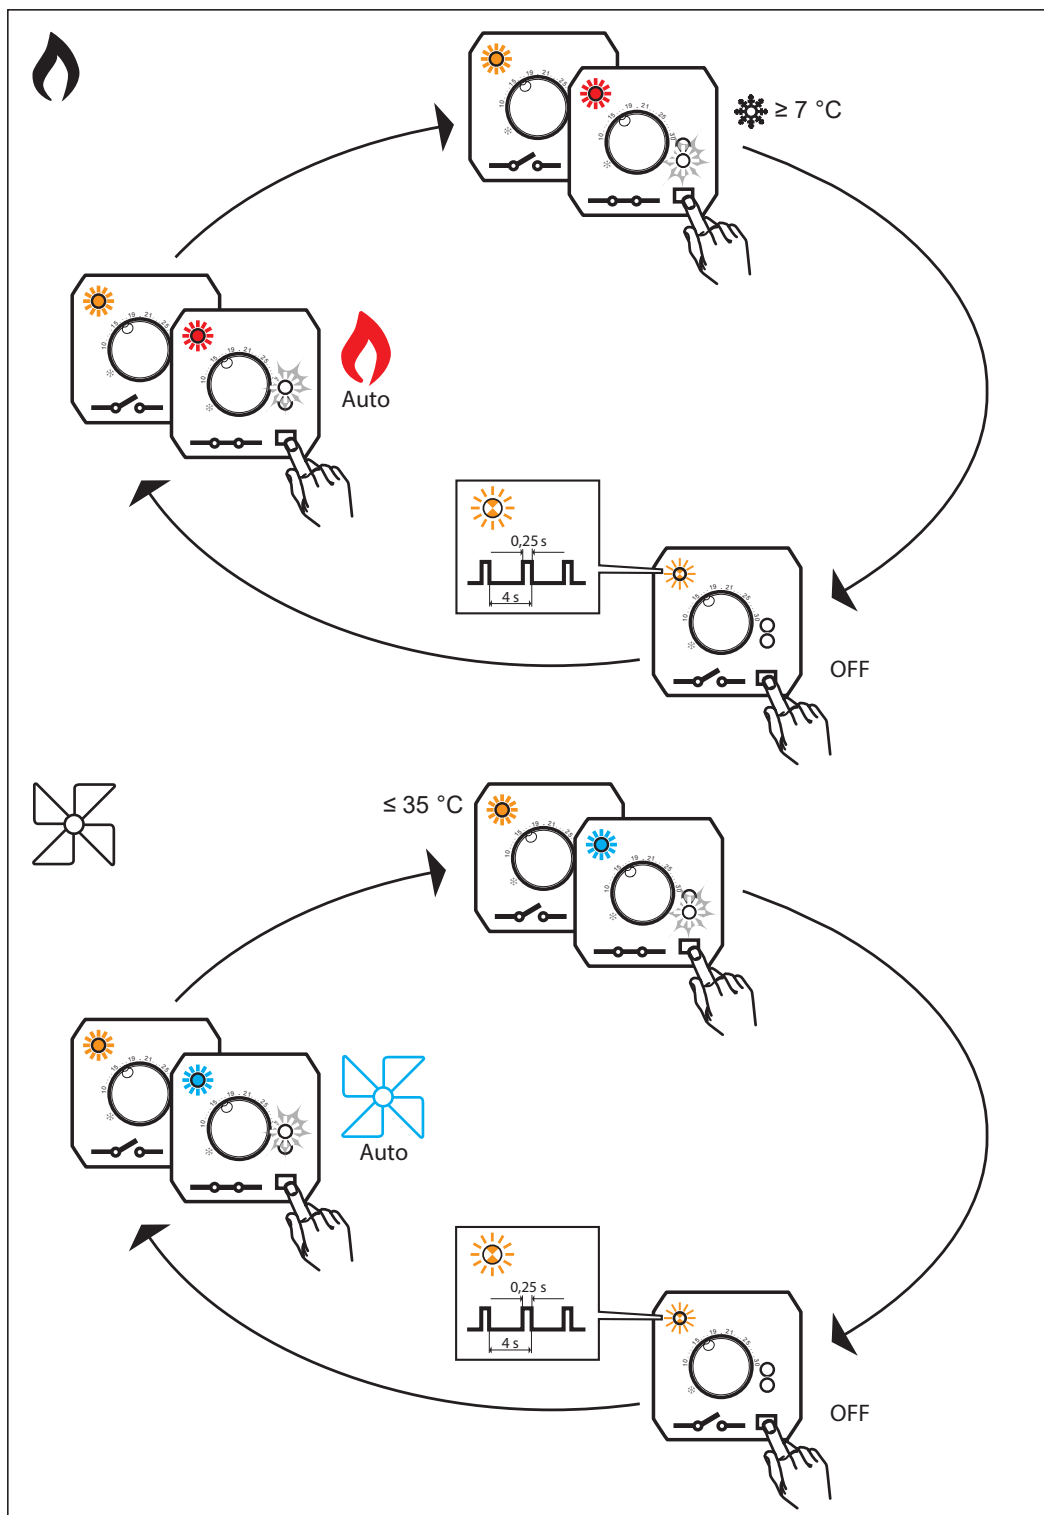

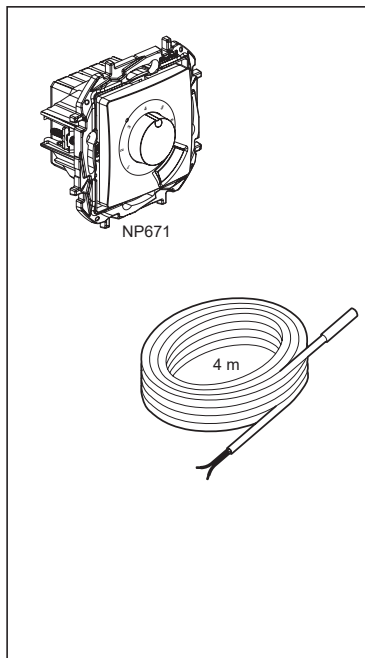

			ΔK
$-10^{\circ}\text{C} \dots +70^{\circ}\text{C}$	$-5^{\circ}\text{C} \dots +40^{\circ}\text{C}$	 1 ... 6 ($10^{\circ}\text{C} \dots 60^{\circ}\text{C}$)	$\pm 2\text{K}$

			P	U
$\leq 20\text{ m}$	250 V~ 16 A, $\cos \varphi = 1$	 6 mm 1,5...4 mm ² 1,5...2,5 mm ²	$< 1\text{ W}$	230 V~ 50 / 60 Hz

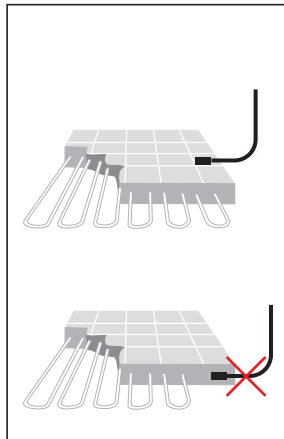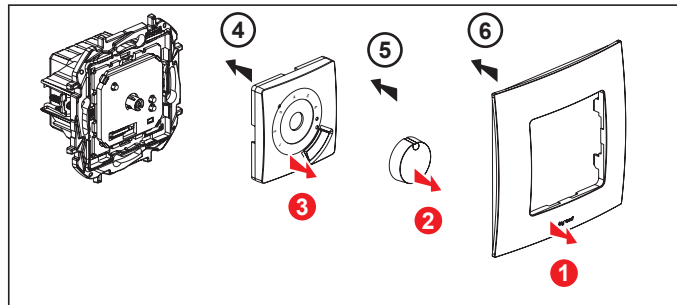

Load



Temperature sensor

