



**Niloé™**

## Blanking plate, mosaic adaptor

Cat. Nos: NP151BK/MG/WH, NP172BK/MG/WH



NP151..



NP172..


### 1. USE

The mechanisms are supplied with cover plates and support frames.  
Flush-mounting or surface-mounting.  
Fixing with screws and or with claws.

### 2. RANGE

Designation	White	Medium Grey	Black
Blanking plate	NP151WH	NP151MG	NP151BK
Mosaic adaptor	NP172WH	NP172MG	NP172BK

### 3. DIMENSIONS (mm)

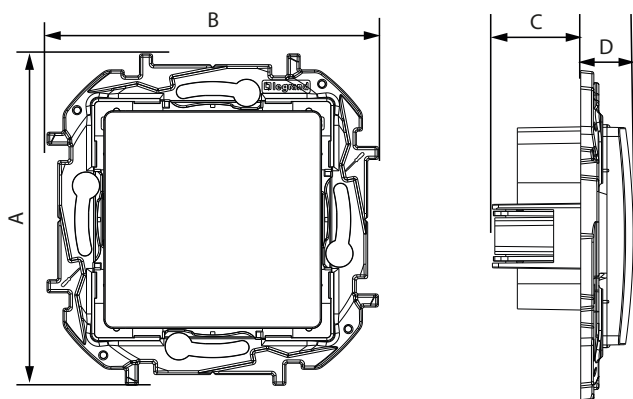

References	A	B	C	D
NP151..	75.8	75.8	20.2	12
NP172..	75.8	75.8	30	10.2

### 4. TECHNICAL CHARACTERISTICS

#### ■ 4.1 Mechanical characteristics

Protection against solide bodies and liquids: IP 20  
Protection against impacts: IK 04

#### ■ 4.2 Material characteristics

Polyglass appearance

Material: - Cover plate: painted PC  
- Halogen-free  
- UV resistant

Material of the support: - PC grey RAL 7016 + 10 % glass fiber  
- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place  
+ 650° C / 30 s for other parts made of insulating materials

#### ■ 4.4 Climatic characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +40°C

### 5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the cleaning agents: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substances, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

### 5. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos: NP151BK/MG/WH - NP172BK/MG/WH) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: [www.legrand.com/ecatalogue](http://www.legrand.com/ecatalogue)