


Metal protection conduit for Ex Applications

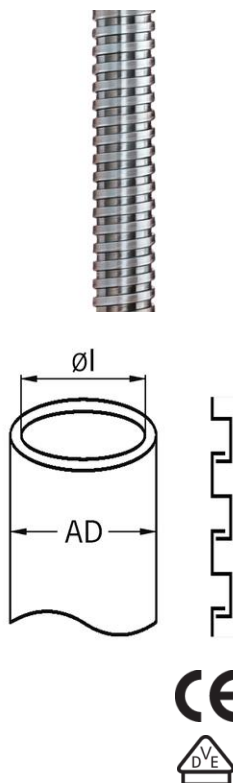

Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-AS

Order number:	1010.111.031
E-No:	125450699
EAN:	7611614015095
Material	zinc coated steel
Properties	Highly flexible, stretch resistant, lateral crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	36 mm
Inner diameter	31 mm
Bending radius static	60 mm
Bending radius dynamic	150 mm
Bushing	5031.027.029
Dispatch	25