


## Metal protection conduit for Ex Applications

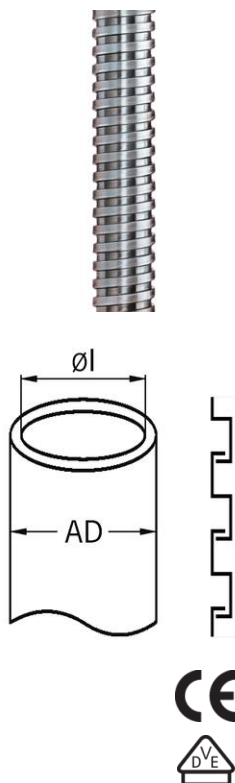

### Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-AS

|                        |                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Order number:</b>   | <b>1010.111.040</b>                                                                                       |
| E-No:                  | 125450799                                                                                                 |
| EAN:                   | 7611614110967                                                                                             |
| Material               | zinc coated steel                                                                                         |
| Properties             | Highly flexible, stretch resistant, lateral crush resistant                                               |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations |
| Tested acc. to         | EN / IEC 61386-23                                                                                         |
| Protection class       | IP 40                                                                                                     |
| Operation temperature  | -50°C / +250°C                                                                                            |
| Outer diameter         | 45 mm                                                                                                     |
| Inner diameter         | 40 mm                                                                                                     |
| Bending radius static  | 82 mm                                                                                                     |
| Bending radius dynamic | 205 mm                                                                                                    |
| Bushing                | 5031.027.036                                                                                              |
| Dispatch               | 25                                                                                                        |