


Protective metal conduit liquid-tight

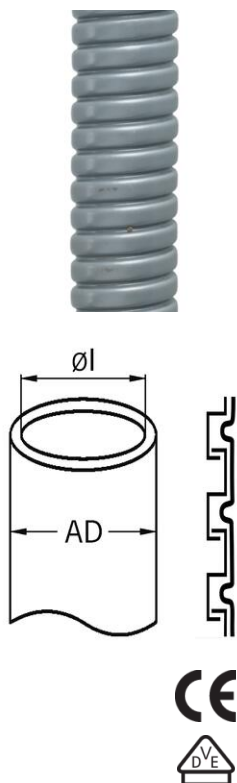

Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PVC-AS
- Grey

Order number:	2010.111.022
E-No:	125481509
EAN:	7611614015446
Material	zinc coated steel
Sheathing	PVC
Properties	Weatherproof, watertight, widely resistant to seawater, acids and oils, free of silicone and cadmium, very flexible, stretch and crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	27 mm
Inner diameter	22 mm
Bending radius static	60 mm
Bending radius dynamic	150 mm
Bushing	5031.028.021
Dispatch	50