


Protective metal conduit liquid-tight

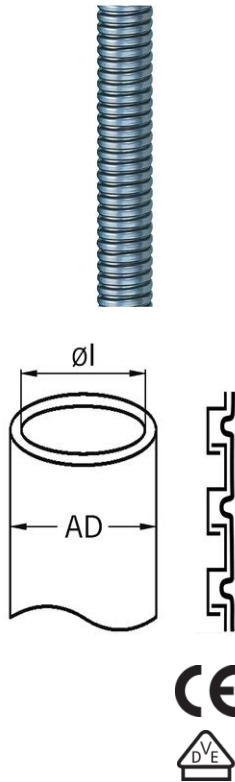

Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PU-AS
- Metallic blue

Order number:	2210.711.029
E-No:	125491602
EAN:	7611614015590
Material	zinc coated steel
Sheathing	Polyurethane
Properties	Oil-, petrol- and grease-resistant, widely resistant to solvents and acids, halogen-free, free of silicone and cadmium, highly tenacity and abrasion resistance, outstanding qualities at low temperature, very flexible, microbe-resistant
Application	Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +100°C / ^ +130°C
Outer diameter	36 mm
Inner diameter	29 mm
Bending radius static	90 mm
Bending radius dynamic	225 mm
Bushing	5031.028.029
Dispatch	25

Available on request:

- Sheathing in polyamide