


## Synthetic protective conduit liquid-tight

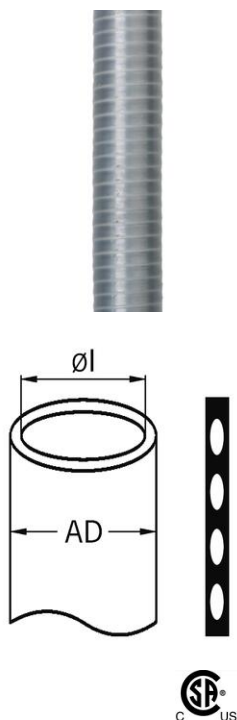

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-GRS
- Grey

|                        |                                                                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order number:          | 0220.101.048                                                                                                                                                                           |
| EAN:                   | 7611614167275                                                                                                                                                                          |
| Material               | PVC with helix of rigid plastic                                                                                                                                                        |
| Properties             | Flexible, air and liquid tight, widely resistant to acids and oil, free from silicone and cadmium, smooth inside and outside, easy pulling in of cables, easy cleansing of the conduit |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations                                                                              |
| Protection class       | IP 68                                                                                                                                                                                  |
| Operation temperature  | -25°C / +90°C / ^ +100°C                                                                                                                                                               |
| Outer diameter         | 56 mm                                                                                                                                                                                  |
| Inner diameter         | 48 mm                                                                                                                                                                                  |
| Bending radius static  | 250 mm                                                                                                                                                                                 |
| Bending radius dynamic | 625 mm                                                                                                                                                                                 |
| Bushing                | 5020.030.048                                                                                                                                                                           |
| Dispatch               | 25                                                                                                                                                                                     |