


Metal protective EMC conduit non liquid-tight

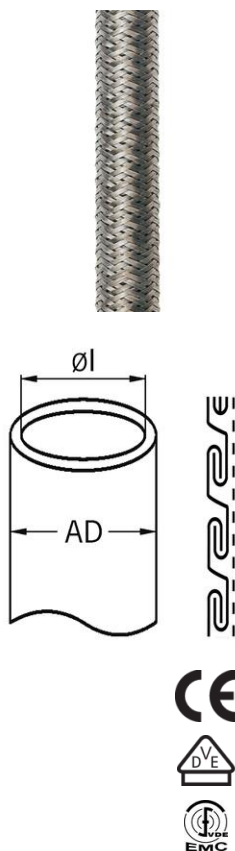

Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- FLEXAgraff®-CU-AS

Order number:	4110.701.029
E-No:	125691699
EAN:	7611614159003
Material	Steel galvanized, double-overlapped
Braiding	Tinned copper
Properties	High torsional- and tensile strength, no untwisting of the conduit, very flexible
Application	Machine and plant constructions, vehicle construction, shipbuilding, railway, automation, electrical installations, EMC applications
Screening attenuation	Shielding factor up to 30 MHz. Up to 80 dB according to EN 50289-1-6
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	36 mm
Inner diameter	29 mm
Bending radius static	130 mm
Bending radius dynamic	325 mm
Bushing	5031.028.029
Dispatch	10

For EMC applications brass thrust collar necessary!