


Metal protective EMC conduits liquid-tight

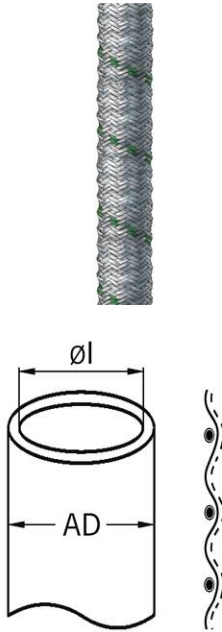

Synthetic protective EMC conduit liquid-tight

- Synthetic protective EMC conduit liquid-tight
- AIRflex®-KUW-EDU

Order number:	4230.101.009
E-No:	125532199
EAN:	7611614202365
Material	Soft PVC jacket, helix of PVC sheathed spring steel wire
Sheathing	Galvanized steel wire
Properties	Very flexible, airtight and liquid-proof, resistant to stretch and twist, widely resistant to oil and acids, free of silicone and cadmium, high internal resistance to compression, protection against hot swarf, good shielding properties, inside protection
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, EMC applications
Screening attenuation	48dB at 130MHz, mean value 20dB
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	14 mm
Inner diameter	9 mm
Bending radius static	16 mm
Bending radius dynamic	40 mm
Bushing	5031.028.009
Dispatch	50

For EMC applications brass thrust collar necessary!