


Metal protective EMC conduit non liquid-tight

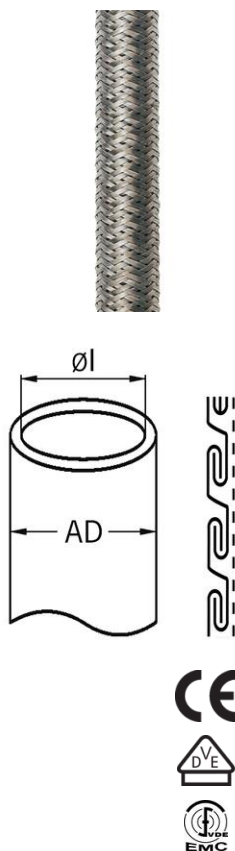

Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- FLEXAgraff®-CU-AS

Order number:	4110.701.013
E-No:	125691299
EAN:	7611614158969
Material	Steel galvanized, double-overlapped
Braiding	Tinned copper
Properties	High torsional- and tensile strength, no untwisting of the conduit, very flexible
Application	Machine and plant constructions, vehicle construction, shipbuilding, railway, automation, electrical installations, EMC applications
Screening attenuation	Shielding factor up to 30 MHz. Up to 80 dB according to EN 50289-1-6
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	17 mm
Inner diameter	13 mm
Bending radius static	60 mm
Bending radius dynamic	150 mm
Bushing	5031.028.011
Dispatch	25

For EMC applications brass thrust collar necessary!