

DOWNLIGHT IP44



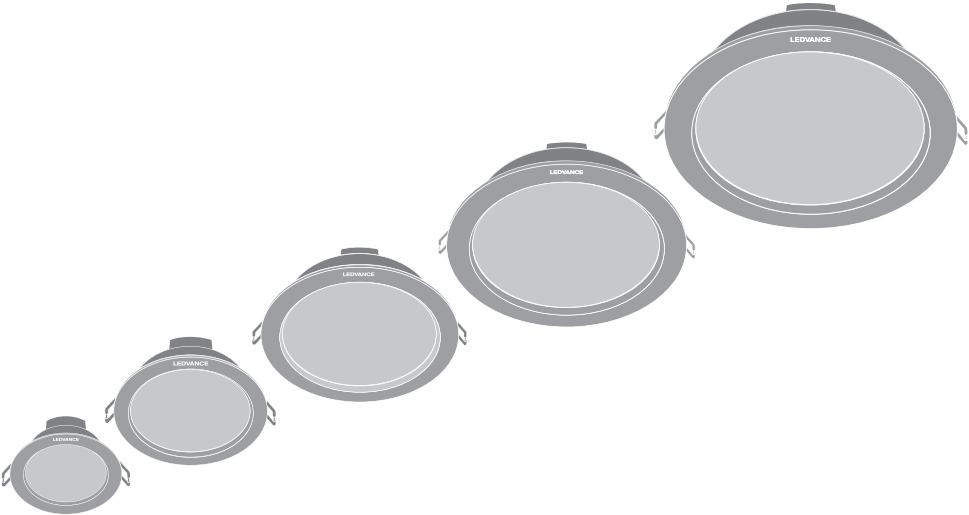

DOWNLIGHT IP44

The LEDVANCE logo consists of a stylized circular graphic on the left, composed of several concentric circles of varying shades of gray, creating a sense of depth and light. To the right of this graphic, the word "LEDVANCE" is written in a bold, uppercase, sans-serif font.


	EAN	Ø x h [mm]	W	VAC	Hz	lm	lm/W	K
DL IP44 DN 90 4W 830 440lm WT	4099854561146	90 x 42	4	220-240	50/60	440	110	3000
DL IP44 DN 90 4W 830 440lm BK	4099854561528	90 x 42	4	220-240	50/60	440	110	3000
DL IP44 DN 90 4W 840 460lm WT	4099854561184	90 x 42	4	220-240	50/60	460	115	4000
DL IP44 DN 90 4W 840 460lm BK	4099854561542	90 x 42	4	220-240	50/60	460	115	4000
DL IP44 DN 90 4W 865 460lm WT	4099854561207	90 x 42	4	220-240	50/60	460	115	6500
DL IP44 DN 90 4W 865 460lm BK	4099854561566	90 x 42	4	220-240	50/60	460	115	6500
DL IP44 DN 115 8W 830 880lm WT	4099854561221	115 x 42	8	220-240	50/60	880	110	3000
DL IP44 DN 115 8W 830 880lm BK	4099854561580	115 x 42	8	220-240	50/60	880	110	3000
DL IP44 DN 115 8W 840 920lm WT	4099854561245	115 x 42	8	220-240	50/60	920	115	4000
DL IP44 DN 115 8W 840 920lm BK	4099854561603	115 x 42	8	220-240	50/60	920	115	4000
DL IP44 DN 115 8W 865 920lm WT	4099854561269	115 x 42	8	220-240	50/60	920	115	6500
DL IP44 DN 115 8W 865 920lm BK	4099854561627	115 x 42	8	220-240	50/60	920	115	6500
DL IP44 DN 165 13W 830 1430lm WT	4099854561283	165 x 42	13	220-240	50/60	1430	110	3000
DL IP44 DN 165 13W 830 1430lm BK	4099854561641	165 x 42	13	220-240	50/60	1430	110	3000
DL IP44 DN 165 13W 840 1495lm WT	4099854561306	165 x 42	13	220-240	50/60	1495	115	4000
DL IP44 DN 165 13W 840 1495lm BK	4099854561665	165 x 42	13	220-240	50/60	1495	115	4000
DL IP44 DN 165 13W 865 1495lm WT	4099854561320	165 x 42	13	220-240	50/60	1495	115	6500
DL IP44 DN 165 13W 865 1495lm BK	4099854561689	165 x 42	13	220-240	50/60	1495	115	6500
DL IP44 DN 190 18W 830 1980lm WT	4099854561344	190 x 42	18	220-240	50/60	1980	110	3000
DL IP44 DN 190 18W 830 1980lm BK	4099854561702	190 x 42	18	220-240	50/60	1980	110	3000
DL IP44 DN 190 18W 840 2070lm WT	4099854561368	190 x 42	18	220-240	50/60	2070	115	4000
DL IP44 DN 190 18W 840 2070lm BK	4099854561726	190 x 42	18	220-240	50/60	2070	115	4000
DL IP44 DN 190 18W 865 2070lm WT	4099854561382	190 x 42	18	220-240	50/60	2070	115	6500
DL IP44 DN 190 18W 865 2070lm BK	4099854561740	190 x 42	18	220-240	50/60	2070	115	6500
DL IP44 DN 215 24W 830 2640lm WT	4099854561405	215 x 43	24	220-240	50/60	2640	110	3000
DL IP44 DN 215 24W 830 2640lm BK	4099854561764	215 x 43	24	220-240	50/60	2640	110	3000
DL IP44 DN 215 24W 840 2760lm WT	4099854561429	215 x 43	24	220-240	50/60	2760	115	4000
DL IP44 DN 215 24W 840 2760lm BK	4099854561788	215 x 43	24	220-240	50/60	2760	115	4000
DL IP44 DN 215 24W 865 2760lm WT	4099854561443	215 x 43	24	220-240	50/60	2760	115	6500
DL IP44 DN 215 24W 865 2760lm BK	4099854561801	215 x 43	24	220-240	50/60	2760	115	6500
DL IP44 DN 215 30W 830 3300lm WT	4099854561467	215 x 43	30	220-240	50/60	3300	110	3000
DL IP44 DN 215 30W 830 3300lm BK	4099854561825	215 x 43	30	220-240	50/60	3300	110	3000
DL IP44 DN 215 30W 840 3450lm WT	4099854561481	215 x 43	30	220-240	50/60	3450	115	4000
DL IP44 DN 215 30W 840 3450lm BK	4099854561849	215 x 43	30	220-240	50/60	3450	115	4000
DL IP44 DN 215 30W 865 3450lm WT	4099854561504	215 x 43	30	220-240	50/60	3450	115	6500
DL IP44 DN 215 30W 865 3450lm BK	4099854561863	215 x 43	30	220-240	50/60	3450	115	6500

DOWNLIGHT IP44




	EAN	IP	IK		R _a	°(°C)	PF	
DL IP44 DN 90 4W 830 440lm WT	4099854561146	44	03	100°	>80	-20...+40	>0.5	50g
DL IP44 DN 90 4W 830 440lm BK	4099854561528	44	03	100°	>80	-20...+40	>0.5	50g
DL IP44 DN 90 4W 840 460lm WT	4099854561184	44	03	100°	>80	-20...+40	>0.5	50g
DL IP44 DN 90 4W 840 460lm BK	4099854561542	44	03	100°	>80	-20...+40	>0.5	50g
DL IP44 DN 90 4W 865 460lm WT	4099854561207	44	03	100°	>80	-20...+40	>0.5	50g
DL IP44 DN 90 4W 865 460lm BK	4099854561566	44	03	100°	>80	-20...+40	>0.5	50g
DL IP44 DN 115 8W 830 880lm WT	4099854561221	44	03	100°	>80	-20...+40	>0.5	65g
DL IP44 DN 115 8W 830 880lm BK	4099854561580	44	03	100°	>80	-20...+40	>0.5	65g
DL IP44 DN 115 8W 840 920lm WT	4099854561245	44	03	100°	>80	-20...+40	>0.5	65g
DL IP44 DN 115 8W 840 920lm BK	4099854561603	44	03	100°	>80	-20...+40	>0.5	65g
DL IP44 DN 115 8W 865 920lm WT	4099854561269	44	03	100°	>80	-20...+40	>0.5	65g
DL IP44 DN 115 8W 865 920lm BK	4099854561627	44	03	100°	>80	-20...+40	>0.5	65g
DL IP44 DN 165 13W 830 1430lm WT	4099854561283	44	03	100°	>80	-20...+40	>0.5	125g
DL IP44 DN 165 13W 830 1430lm BK	4099854561641	44	03	100°	>80	-20...+40	>0.5	125g
DL IP44 DN 165 13W 840 1495lm WT	4099854561306	44	03	100°	>80	-20...+40	>0.5	125g
DL IP44 DN 165 13W 840 1495lm BK	4099854561665	44	03	100°	>80	-20...+40	>0.5	125g
DL IP44 DN 165 13W 865 1495lm WT	4099854561320	44	03	100°	>80	-20...+40	>0.5	125g
DL IP44 DN 165 13W 865 1495lm BK	4099854561689	44	03	100°	>80	-20...+40	>0.5	125g
DL IP44 DN 190 18W 830 1980lm WT	4099854561344	44	03	100°	>80	-20...+40	>0.5	160g
DL IP44 DN 190 18W 830 1980lm BK	4099854561702	44	03	100°	>80	-20...+40	>0.5	160g
DL IP44 DN 190 18W 840 2070lm WT	4099854561368	44	03	100°	>80	-20...+40	>0.5	160g
DL IP44 DN 190 18W 840 2070lm BK	4099854561726	44	03	100°	>80	-20...+40	>0.5	160g
DL IP44 DN 190 18W 865 2070lm WT	4099854561382	44	03	100°	>80	-20...+40	>0.5	160g
DL IP44 DN 190 18W 865 2070lm BK	4099854561740	44	03	100°	>80	-20...+40	>0.5	160g
DL IP44 DN 215 24W 830 2640lm WT	4099854561405	44	03	100°	>80	-20...+40	>0.5	200g
DL IP44 DN 215 24W 830 2640lm BK	4099854561764	44	03	100°	>80	-20...+40	>0.5	200g
DL IP44 DN 215 24W 840 2760lm WT	4099854561429	44	03	100°	>80	-20...+40	>0.5	200g
DL IP44 DN 215 24W 840 2760lm BK	4099854561788	44	03	100°	>80	-20...+40	>0.5	200g
DL IP44 DN 215 24W 865 2760lm WT	4099854561443	44	03	100°	>80	-20...+40	>0.5	200g
DL IP44 DN 215 24W 865 2760lm BK	4099854561801	44	03	100°	>80	-20...+40	>0.5	200g
DL IP44 DN 215 30W 830 3300lm WT	4099854561467	44	03	100°	>80	-20...+40	>0.9	260g
DL IP44 DN 215 30W 830 3300lm BK	4099854561825	44	03	100°	>80	-20...+40	>0.9	260g
DL IP44 DN 215 30W 840 3450lm WT	4099854561481	44	03	100°	>80	-20...+40	>0.9	260g
DL IP44 DN 215 30W 840 3450lm BK	4099854561849	44	03	100°	>80	-20...+40	>0.9	260g
DL IP44 DN 215 30W 865 3450lm WT	4099854561504	44	03	100°	>80	-20...+40	>0.9	260g
DL IP44 DN 215 30W 865 3450lm BK	4099854561863	44	03	100°	>80	-20...+40	>0.9	260g

DOWNLIGHT IP44

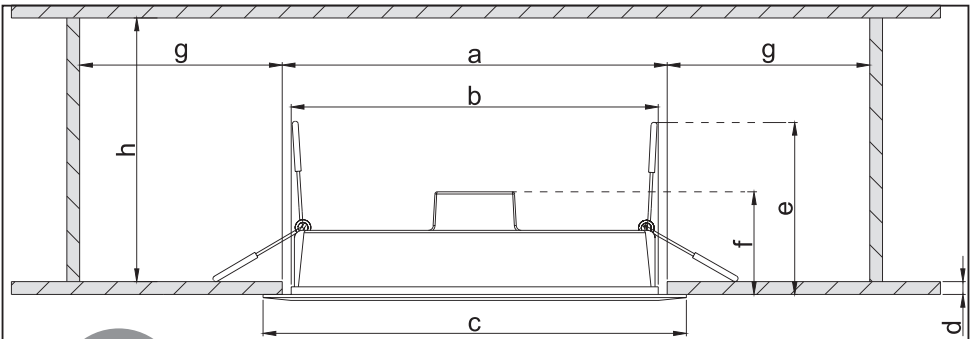


Model	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	h [mm]
DL IP44 DN90	Ø 75	Ø 68	Ø 90	5-25	68	40	>60	>70
DL IP44 DN115	Ø 100	Ø 93	Ø 115	5-25	68	40	>60	>70
DL IP44 DN165	Ø 150	Ø 143	Ø 165	5-25	68	40	>60	>70
DL IP44 DN190	Ø 175	Ø 168	Ø 190	5-25	68	40	>60	>70
DL IP44 DN215	Ø 200	Ø 194	Ø 215	5-25	68	40	>60	>70


1








ON
↑





2

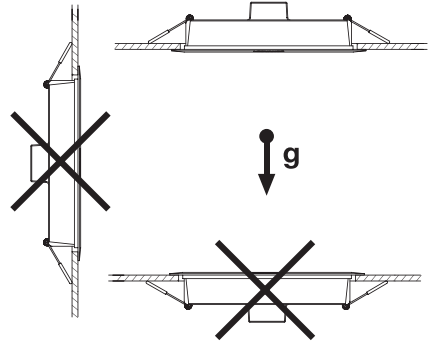

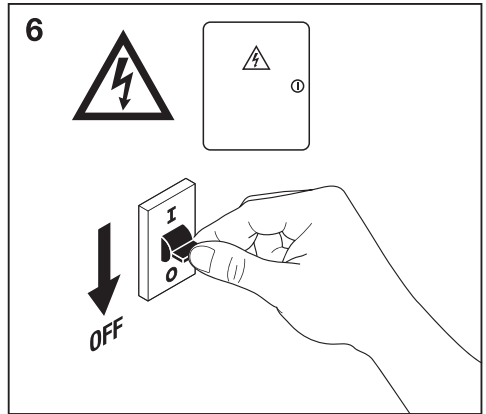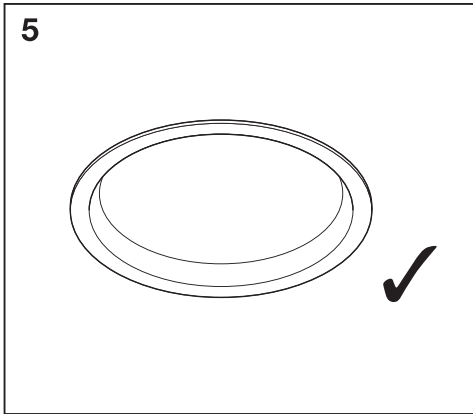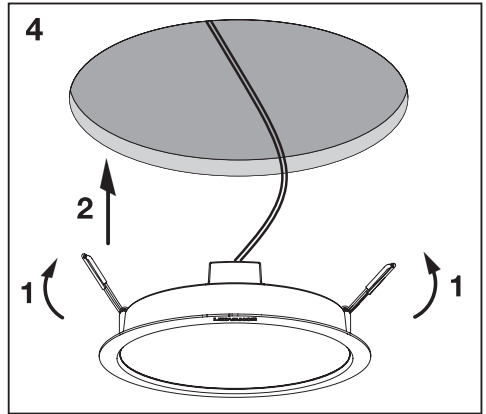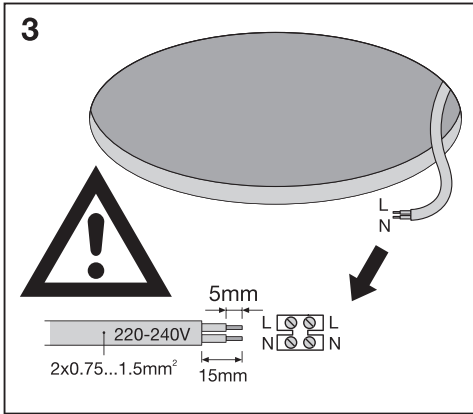

	B16	B25	B32	C16	C25	C32
DL IP44 DN 90 4W 8XX WT/BK	108	169	216	154	241	309
DL IP44 DN 115 8W 8XX WT/BK	105	164	210	150	234	300
DL IP44 DN 165 13W 8XX WT/BK	52	81	104	80	126	161
DL IP44 DN 190 18W 8XX WT/BK	49	77	99	76	120	153
DL IP44 DN 215 24W 8XX WT/BK	41	64	82	63	98	126
DL IP44 DN 215 30W 8XX WT/BK	18	28	36	31	48	62

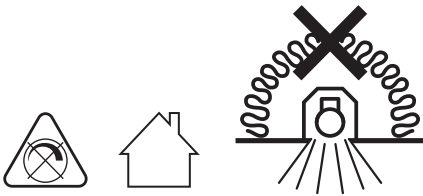

FR
Cet appareil,
ses accessoires
et son cordon,
se recyclent

À DÉPOSER
EN MAGASIN

OU

À DÉPOSER
EN DÉCHÈTERIE

Points de collecte sur www.quefairedemesdechets.fr



C10449057
G11229346v1
18.03.25

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

© LEDVANCE Ltd, Sterling House, 810
Mandarin Court, Warrington, Cheshire,
WA1 1GG, United Kingdom