


Technical data sheet

Height-adjustable, decouplable cassette for tube body,
stainless steel

Item number: 7409605



Height-adjustable and decouplable square cassette for flush-floor and jointless device installation in underfloor connection sockets UZD 250-3 (minimum installation depth 151 mm)/UGD55 250-3 (minimum installation depth 136 mm). Suitable for all cement screeds. Cassette frame with integrated lined body and height adjustment function. The height of the cassette frame is adjusted to the top edge of the floor covering using four slots. Suitable for dry, moist or wet-cleaned floors. The cassette is fixed in the mounting cover by fastening brackets during screed/ Terrazzo work and is decoupled in all directions in the installed state. The cassette frame is made of stainless steel with a 25 mm-deep floor covering recess in the lid.

Height-adjustable cassette with tube body. For the installation of three UT4 universal supports for nine single devices with support ring/support clamp or 12 Modul 45® devices. The scope of delivery contains an aluminium screed protection cover (grindable), a suitable mounting lid to fix the cassette lined body and an ISO apron for decoupling from the underfloor connection socket. The tube body is not contained in the scope of delivery.



A2 Stainless steel

Master data

| | |
|------------------------------------|--------------------------------|
| Item number | 7409605 |
| Type | TRKFN 9 VS 250 |
| Description 1 | Square cassette seamless floor |
| Description 2 | rectangular, tube body |
| Manufacturer | OBO |
| Dimension | 243x243x83 |
| Material | Stainless steel |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 724.2 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 42,6229 kg CO2e / 1 Piece |


Technical data sheet

Height-adjustable, decouplable cassette for tube body,
stainless steel


Item number: 7409605



Dimensions



| | |
|--------|--------|
| Length | 243 mm |
| Width | 243 mm |
| Height | 81 mm |

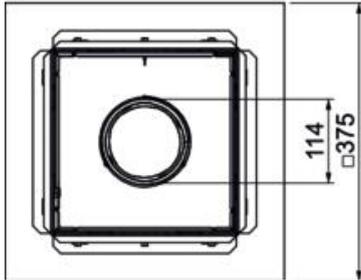

Technical data

| | |
|--|-----------------------------|
| Number of installable devices | 12 |
| Number of cable outlets | 1 |
| Number of universal supports | 3 x UT4 |
| Version for | Square |
| Cable outlet version | Lowerable tube body |
| Floor care | Wet |
| Decouplable | yes |
| Screed height, max. | 110 mm |
| Screed height, min. | 69 mm |
| Floor height, max. | 442 mm |
| Floor height, min. | 136 mm |
| Suitable for raised floor installation | no |
| Suitable for cavity floor installation | no |
| Suitable for | Underfloor socket structure |
| Suitable for underfloor box | 250 |
| Device support to accept mounting boxes | no |
| Nominal size for device installation units | 9 |
| Height-adjustment range, max. | 110 mm |
| Height-adjustment range, min. | 69 mm |
| Standard | EN 50085-2-2 |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP55 |
| Protection rating IK code | IK10 |
| Heavy-duty version | no |
| Installation system type | UT4 |
| Vertical load, large area | to 5,000 N |
| Vertical load, small area | to 3,000 N |
| Approvals | VDE |
| Floor covering thickness | 25 mm |