

Technical data sheet

Device support for CEE installation, system length 208 mm,
with CEE

Item number: 7407667



Device support of nominal size 3 with a CEE plug connection 16 A for installation in service outlets and cassettes of nominal sizes R7, 9 and R9. Device support with protective housing and strain relief. Required minimum installation depth: 190 mm when using a straight connector and 160 mm when an angled connector is used.



St Steel

FS Strip galvanized

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 7407667 |
| Type | GT3 CEE16 |
| Description 1 | Mounting box |
| Description 2 | with CEE16 |
| Manufacturer | OBO |
| Dimension | 218x75x128 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 75 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,3589 kg CO2e / 1 Piece |


Technical data sheet

Device support for CEE installation, system length 208 mm,
with CEE

Item number: 7407667



Dimensions

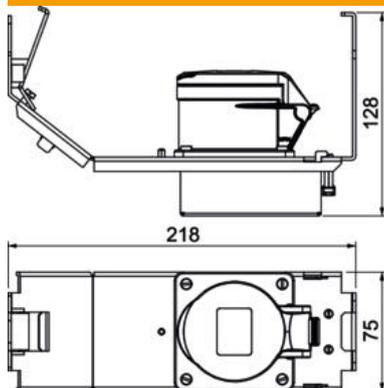

Technical data

| | |
|---|-----|
| Floor plate | no |
| Seal installation option | no |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor ducts | yes |