

Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 80 mm,
pure white
Item number: 7218128



Wall connection collar, 4-sided, with integrated seal for PYROLINE® Rapid PLM installation duct. For mounting in the area of wall and ceiling connections as well as wall penetrations. Can also be used as 3-sided wall connection collar for direct wall or ceiling mounting of the duct.



- St** Steel
- P** Powder-coated

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 7218128 |
| Type | PLM WC 0810 RW |
| Description 1 | Wall connection collar |
| Description 2 | 3- and 4-sided |
| Manufacturer | OBO |
| Dimension | 85x253x233 |
| Colour | Pure white; RAL 9010 |
| Material | Steel |
| Surface | Powder-coated |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 64.3 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,1845 kg CO2e / 1 Piece |


Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 80 mm,
pure white

Item number: 7218128



Dimensions

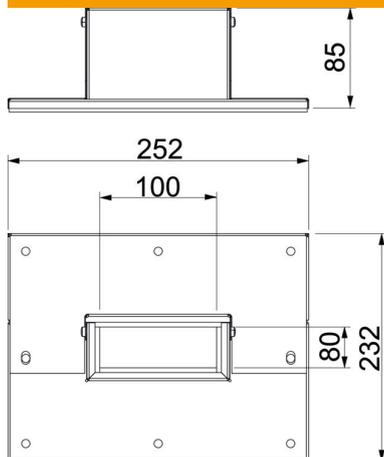

| | |
|-------------|--------|
| Dimension B | 252 mm |
| Dimension b | 100 mm |
| Dimension D | 232 mm |
| Dimension d | 80 mm |

Technical data

| | |
|-------------------|------------------------|
| Type of accessory | Wall connection collar |
| Accessories | yes |
| Spare part | no |