


Technical data sheet

HF-VK 37.5 wiring ducts, duct width 37.5

Item number: 6132470

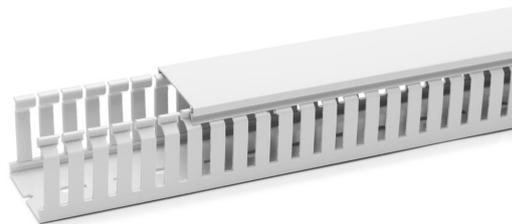

Halogen-free wiring duct for horizontal and vertical routing in the switchgear cabinet.

Direct mounting on the wall via the integrated base perforation (with double-sided adhesive tape as mounting aid). Hardly inflammable and self-extinguishing after removal of a naked flame. The retainers in the duct base can be broken out without tools.

Tested to DIN EN 50085-2-3.

Base and cover in set.

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

Item number	6132470
Type	HFVK3737 lgr
Description 1	Slotted cable trunking system
Description 2	HF DIN Set 37,5x37,5 7035
Manufacturer	OBO
Colour	Light grey; RAL 7035
Material	Polycarbonate/Acrylnitrile-butadiene-styrene
Smallest sales unit	2
Unit of quantity	Metre
Weight	35 kg
Weight unit	kg/100 m

Dimensions

Length	2,000 mm
Width	38 mm
Height	38 mm

Technical data sheet

HF-VK 37.5 wiring ducts, duct width 37.5

Item number: 6132470



Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	yes
Creepage current-resistant	yes
With cover	yes
Usable cross-section	9.75 cm ²
Slot spacing	7.5 mm
Slot width	5 mm
Permitted temperature range, max.	90 °C
Permitted temperature range, min.	-25 °C