

Technical data sheet

External corner, trunking type WDK 100130

Item number: 6024476



External corner hood for changing the direction of the WDK trunking.



PVC

 Polyvinylchloride

| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 6024476                  |  |
| Type                               | WDK A100130GR            |  |
| Description 1                      | External corner          |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 348x130x100              |  |
| Colour                             | Stone grey; RAL 7030     |  |
| Material                           | Polyvinylchloride        |  |
| Smallest sales unit                | 1                        |  |
| Unit of quantity                   | Piece                    |  |
| Weight                             | 136.1 kg                 |  |
| Weight unit                        | kg/100 pc.               |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 5,1896 kg CO2e / 1 Piece |  |


# Technical data sheet

## External corner, trunking type WDK 100130

Item number: 6024476



### Dimensions

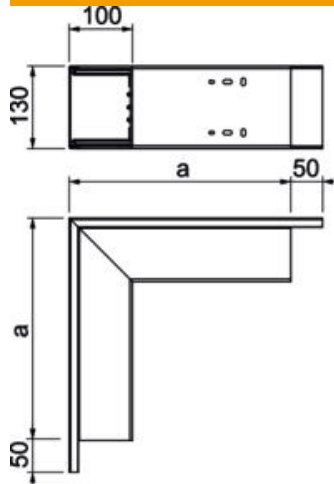

|             |        |
|-------------|--------|
| Length      | 348 mm |
| Width       | 130 mm |
| Height      | 100 mm |
| Dimension a | 348 mm |

### Technical data

|                                   |                  |
|-----------------------------------|------------------|
| Version for                       | Base and cover   |
| Fastening type                    | Base perforation |
| Maintain electrical functions     | no               |
| for duct dimension                | 100 x 130        |
| Halogen-free                      | no               |
| Trunking depth                    | 100 mm           |
| Protection rating                 | IP30             |
| Protective film                   | no               |
| Protection rating IK code         | IK04             |
| Self-extinguishing                | yes              |
| Permitted temperature range, max. | 60 °C            |
| Permitted temperature range, min. | -5 °C            |
| Angle range, max.                 | 90 mm            |
| Angle range, min.                 | 90 mm            |