


Technical data sheet

Cable tray, marine standard FT

Item number: 6045200



Cable tray for use in ship construction, produced according to the marine standard VG 88900-1.

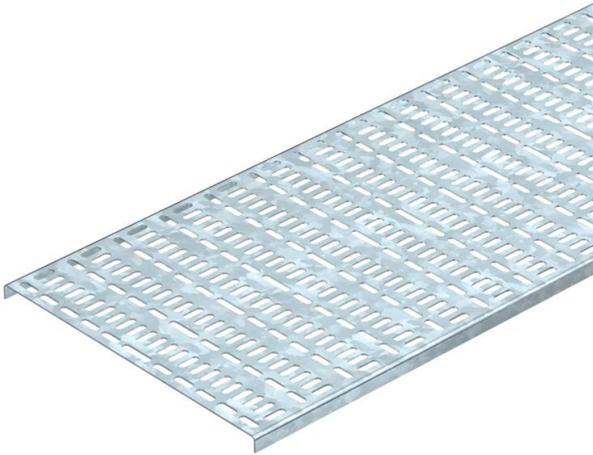

St Steel

FT Hot-dip galvanised

Master data

| | |
|------------------------------------|----------------------------|
| Item number | 6045200 |
| Type | MKR 15 200 FT |
| Description 1 | Cable tray marine standard |
| Description 2 | Material thickness 1.50mm |
| Manufacturer | OBO |
| Dimension | 15x200x2000 |
| Colour | zinc |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 207.6 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 5,5517 kg CO2e / 1 Meter |


Technical data sheet

Cable tray, marine standard FT

Item number: 6045200



Dimensions

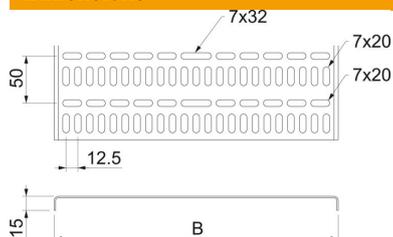

| | |
|-----------------|----------|
| Dimension | 15 x 200 |
| Length | 2,000 mm |
| Width | 200 mm |
| Height | 15 mm |
| Plate thickness | 1.5 mm |
| Dimension B | 200 mm |

Technical data

| | |
|---|--------------------|
| Connector version | Without connectors |
| Walkable | no |
| Maintain electrical functions | no |
| With cover | no |
| Mounting perforation in base | yes |
| NATO hole pattern | yes |
| Rustproof steel, pickled | no |
| Side perforation | no |
| Wide-span version | no |
| Load test type according to IEC 61537 | Type II |
| Type of connector, cable support system | Screwed |

Loads

| | |
|-----------------------|----------|
| Support spacing 1.0 m | 0.7 kN/m |
| Support spacing 1.5 m | 0.2 kN/m |