

# Technical data sheet

T piece, asymmetrical, double, for device installation trunking Rapid 80 type GS-D70170

Item number: 6278260



T piece suitable for direct wall mounting.



St Steel

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6278260                  |
| Type                               | GS-DT70170RW             |
| Description 1                      | T piece                  |
| Description 2                      | asymmetrical             |
| Manufacturer                       | OBO                      |
| Dimension                          | 70x170x500               |
| Colour                             | Pure white; RAL 9010     |
| Material                           | Steel                    |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 188.1 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 9,5664 kg CO2e / 1 Piece |


# Technical data sheet

T piece, asymmetrical, double, for device installation trunking Rapid 80 type GS-D70170


Item number: 6278260



## Dimensions

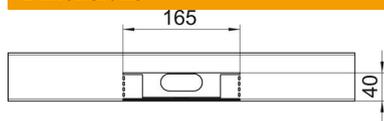

|        |        |
|--------|--------|
| Length | 500 mm |
| Width  | 170 mm |
| Height | 70 mm  |

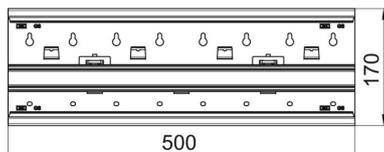

## Technical data

|                                   |          |
|-----------------------------------|----------|
| Number of covers                  | 2        |
| Version for                       | Base     |
| for duct width                    | 170 mm   |
| for trunking height               | 70 mm    |
| Halogen-free                      | yes      |
| Cable retaining clip              | no       |
| Duct connector                    | no       |
| Cover mounting type               | Internal |
| Mounting perforation in base      | yes      |
| Cover width                       | 76.5 mm  |
| Cover width 2                     | 45 mm    |
| Protection rating                 | IP30     |
| Protective film                   | yes      |
| Protection rating IK code         | IK10     |
| Symmetrical                       | no       |
| Permitted temperature range, max. | 60 °C    |
| Permitted temperature range, min. | -25 °C   |