

Technical data sheet

Service pole, type ISSDM45

Item number: 6289972



ISS aluminium service pole with a 45 mm system opening.

Set consists of:

1 two-compartment pole with clamping fastening

Total length 3,315–3,480 mm

1 ceiling fastening with clamping device

2 aluminium covers, length: 3,000 mm


The clamping device attached at the top of the ISS service pole can be variably

adjusted between 315 and 480 mm. Possible colour options are aluminium an-

odised or pure white. The pole is based on a slender, oval aluminium profile.

There are two 45 mm system openings on opposite sides for direct installation of

Module 45® devices.



Alu Aluminium

EL Anodised

Master data

Item number	6289972
Type	ISSDM45EL
Description 1	Service pole
Description 2	floor/ceiling
Manufacturer	OBO
Dimension	3000x80x130
Colour	aluminium
Material	Aluminium
Surface	Anodised
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	1172 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	144,6675 kg CO2e / 1 Piece


Technical data sheet

Service pole, type ISSDM45



Item number: 6289972

Dimensions

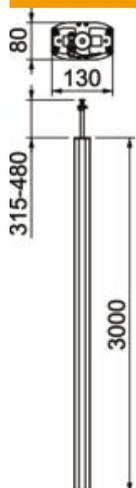

Length	3,000 mm
Width	80 mm
Height	130 mm

Technical data

Number of usable covers	2
Number of compartments	2 St.
Version for	Double-sided
Fastening type	Tension
Floor mounting	yes
Ceiling mounting	yes
Continuous profile	yes
Halogen-free	yes
Height compensation, max.	480 mm
Height compensation, min.	315 mm
Cable entry	Top/bottom
Cover width	45 mm
Changes according to location	no
Pole shape	Oval
Pole height, max.	3480 mm
Pole height, min.	3315 mm
Adjustable	yes
Pre-wired	no