

# Technical data sheet

CL2008 profile rail, slot 11 mm, perforated, breakable

Item number: 1105906



Light-duty C profile rail for cable routing, in conjunction with series clips or clamp clips with N foot. Can also be used in building of control cabinets.  
Perforated, cannot be broken.



**St** Steel

**FS** Strip galvanized

## Master data

Item number	1105906
Type	CL2008BP1000FS
Description 1	Profile rail
Description 2	perforated, slot 11mm
Manufacturer	OBO
Dimension	1000x20x8
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	10
Unit of quantity	Metre
Weight	21.5 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	0,5401 kg COe / 1 Meter


# Technical data sheet

CL2008 profile rail, slot 11 mm, perforated, breakable



Item number: 1105906

## Dimensions

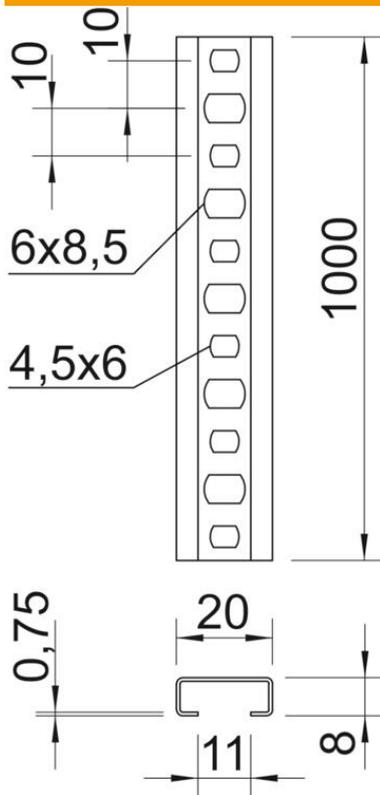

Length	1,000 mm
Width	20 mm
Height	8 mm
Dimension L	1,000 mm

## Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	10 mm
Bundle	10 m
Maintain electrical functions	no
Material thickness	0.75 mm
With perforation	yes
With tothing	no
Profile shape	C profile
Slot width	11 mm
Static value A	0.24 cm <sup>2</sup>
Static value Iy	0.02 cm
Static value Iz	0.17 cm
Static value Wy	0.05 cm <sup>2</sup>
Static value Wz	0.17 cm <sup>2</sup>