

# Technical data sheet

Flat angle, trunking type WDK 100230

Item number: 6182365



Flat angle for changing the direction of the WDK trunking.



**PVC** Polyvinylchloride

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6182365                  |
| Type                               | WDK F100230LGR           |
| Description 1                      | Flat angle               |
| Manufacturer                       | OBO                      |
| Dimension                          | 400x230x100              |
| Colour                             | Light grey; RAL 7035     |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 188.5 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,6972 kg CO2e / 1 Piece |


# Technical data sheet

Flat angle, trunking type WDK 100230

Item number: 6182365



## Dimensions

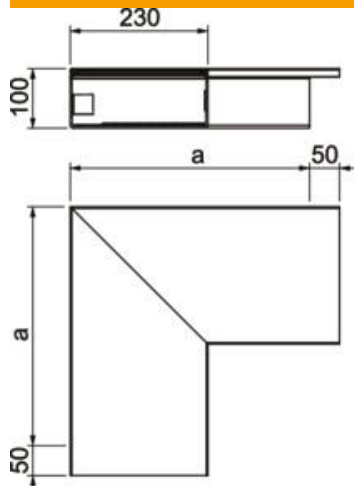

|             |        |
|-------------|--------|
| Length      | 400 mm |
| Width       | 230 mm |
| Height      | 100 mm |
| Dimension a | 400 mm |

## Technical data

|                                   |                  |
|-----------------------------------|------------------|
| Version for                       | Base and cover   |
| Fastening type                    | Base perforation |
| Maintain electrical functions     | no               |
| for duct dimension                | 100 x 230        |
| Halogen-free                      | no               |
| Trunking depth                    | 100 mm           |
| Protection rating                 | IP30             |
| Protective film                   | no               |
| Protection rating IK code         | IK04             |
| Permitted temperature range, max. | 60 °C            |
| Permitted temperature range, min. | -5 °C            |
| Angle range, max.                 | 90 mm            |
| Angle range, min.                 | 90 mm            |