

# Technical data sheet

Lid butt support for trunking width 400, 500 and 600 mm

Item number: 7424944



For underlaying and sealing joints of nominal trunking widths of 400, 500 or 600.  
With central, height-adjustable support.




**St** Steel

**FS** Strip galvanized

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7424944                  |
| Type                               | DSU2 600 4030            |
| Description 1                      | Lid butt support         |
| Description 2                      | for OKA-W                |
| Manufacturer                       | OBO                      |
| Material                           | Steel                    |
| Surface                            | Strip galvanized         |
| Surface standard                   | DIN EN 10346             |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 47.29 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,2595 kg CO2e / 1 Piece |

## Dimensions

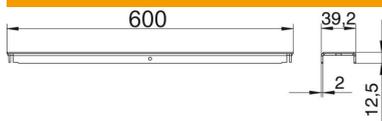

|             |        |
|-------------|--------|
| Width       | 600 mm |
| Dimension A | 600 mm |

# Technical data sheet

Lid butt support for trunking width 400, 500 and 600 mm

Item number: 7424944



## Technical data

| Type of accessory             | Miscellaneous |
|-------------------------------|---------------|
| Trunking height, max.         | 70 mm         |
| Duct height, min.             | 40 mm         |
| Minimum screed height         | 40            |
| Centre support                | yes           |
| Height-adjustment range, min. | 0 mm          |
| Accessories                   | yes           |
| Spare part                    | no            |