

# Technical data sheet

## Black powder-coated steel sleeve, with thread

Item number: 2046524



Accessory part: coupling with thread according to EN 60423 to connect electrical installation pipes and 90° bends.



- St** Steel
- PE50** PES50 - Polyester/epoxy

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2046524                  |
| Type                               | SVM25W SW                |
| Description 1                      | Conduit threaded coupler |
| Description 2                      | with thread              |
| Manufacturer                       | OBO                      |
| Dimension                          | M25x1,5                  |
| Colour                             | Jet black; RAL 9005      |
| Material                           | Steel                    |
| Surface                            | PES50 - Polyester/epoxy  |
| Surface standard                   |                          |
| Smallest sales unit                | 50                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 5 kg                     |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1959 kg COe / 1 Piece  |


# Technical data sheet

## Black powder-coated steel sleeve, with thread

Item number: 2046524



### Dimensions

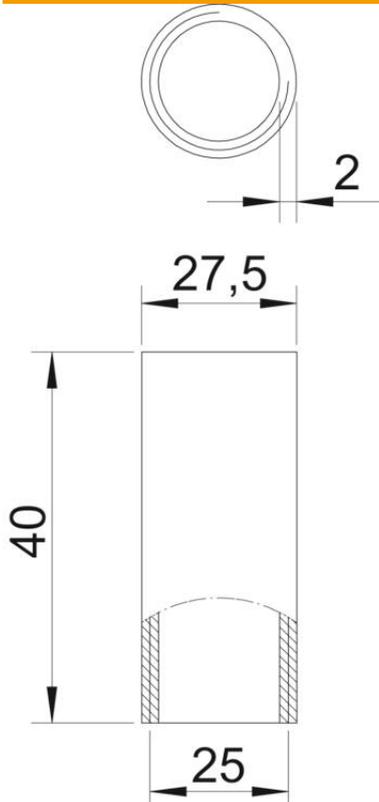

|                  |         |
|------------------|---------|
| Length           | 40 mm   |
| Dimension D      | 27.5 mm |
| Dimension d      | 25 mm   |
| Dimension L      | 40 mm   |
| Dimension m (mm) | M25     |
| Dimension t      | 2 mm    |

### Technical data

|                                   |         |
|-----------------------------------|---------|
| Version for pipe diameter         | 25 mm   |
| Thread                            | M25x1,5 |
| Size                              | 25      |
| Halogen-free                      | no      |
| With inspection opening and lid   | no      |
| Brushed surface                   | no      |
| Polished surface                  | no      |
| Permitted temperature range, max. | 250 °C  |
| Permitted temperature range, min. | -45 °C  |
| Two-part                          | no      |