


# Technical data sheet

Internal corner, for device installation trunking Rapid 80 type GK-70170

Item number: 6274740



Internal corner for changing the direction of the GK device installation trunking.

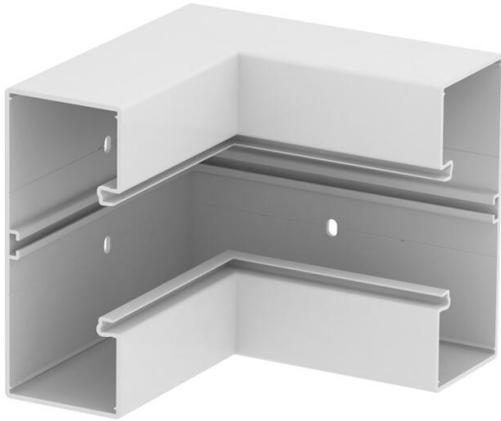

**PVC** Polyvinylchloride

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6274740                  |
| Type                               | GK-I70170RW              |
| Description 1                      | Internal corner          |
| Manufacturer                       | OBO                      |
| Dimension                          | 70x170mm                 |
| Colour                             | Pure white; RAL 9010     |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 60 kg                    |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,4769 kg CO2e / 1 Piece |


# Technical data sheet

Internal corner, for device installation trunking Rapid 80 type GK-70170

Item number: 6274740



## Dimensions

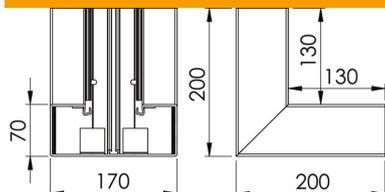

|        |        |
|--------|--------|
| Length | 200 mm |
| Width  | 170 mm |
| Height | 70 mm  |

## Technical data

|                                   |             |
|-----------------------------------|-------------|
| Number of covers                  | 1           |
| Version for                       | Base        |
| Shape                             | Symmetrical |
| Halogen-free                      | no          |
| Cable retaining clip              | no          |
| Duct connector                    | no          |
| Cover mounting type               | Internal    |
| Mounting perforation in base      | yes         |
| Cover width                       | 76.5 mm     |
| Cover width 2                     | 0 mm        |
| Cover width 3                     | 0 mm        |
| Protection rating                 | IP30        |
| Protective film                   | yes         |
| Protection rating IK code         | IK08        |
| Permitted temperature range, max. | 60 °C       |
| Permitted temperature range, min. | -15 °C      |
| Angle range, max.                 | 90 mm       |
| Angle range, min.                 | 90 mm       |